


TTAinterfaceTrendAnalysis

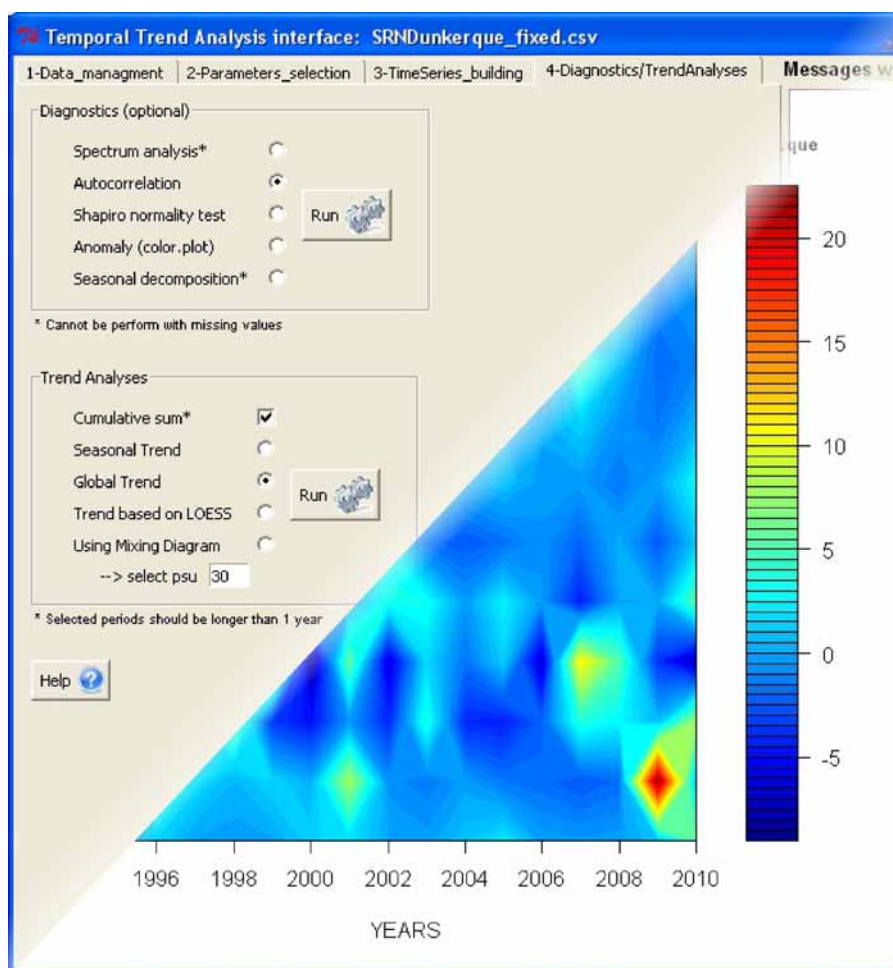

An Interface for Temporal Trend Analysis and diagnostics

User guide

Contents

Introduction	4
A. Installing R and the TTAinterface package	4
B. Create your dataset	6
C. Quick steps	9
1. Managing your database	9
<u>Import your database</u>	9
<u>Change the save directory</u>	10
<u>Display your data</u>	10
<u>Summarize your raw dataset</u>	10
<u>Edit your data</u>	11
2. Select your parameters	12
<u>Summarize your selected parameters</u>	12
3. Build your time series	14
<u>Outliers and missing values</u>	14
<u>Aggregation methods</u>	15
4. Perform diagnostics and trend analyses	16
<u>Diagnostics tools (first frame)</u>	17
<u>Temporal trend tests (Trend Analyses frame)</u>	18
D. Detailed documentation	22
1. Interface organisation	22
2. Files and data managing panel	22
2.1 <i>Import CSV file</i>	22
2.2 <i>Select your save directory</i>	24
2.3 <i>Display your raw data</i>	25
2.4 <i>Edit your data – solve some importation issues</i>	25

3. Parameters selection panel	26
3.1 <i>Sampling stations</i>	27
3.2 <i>The parameters</i>	28
3.3 <i>Depth and salinity.....</i>	28
3.4 <i>Years and months</i>	29
4. Time series building panel	29
4.1 <i>Missing values and outliers</i>	30
4.2 <i>Data frequency selection of your time series.....</i>	31
4.3 <i>Method of aggregation of your time series</i>	32
4.4 <i>Visualised your regularized time series</i>	32
5. Diagnostics, statistics panel	33
5.1 <i>Diagnostic tools</i>	33
5.2 <i>Temporal trend tests</i>	37
6. Results and messages	43
7. Extra advices	44
References	44

Introduction

The **TTAinterfaceTrendAnalysis** package is written with the R programming language in version 2.14+. It allows performing temporal trend analysis through a graphical user interface (GUI). The advantage of such kind of GUI is the balanced choice it offer between the wide variety of analysis, the freedom that offer R through the console or its different packages but which avoid to perform routine analysis by a lambda user and the easiness of a clear interface with driven choice of well choose analysis and diagnostics tools that allow routine analysis in the frame of a common procedure. As an R coded interface this package is freely distributing (GPL Licence).

This document is a guide that shows you how to use the interface. The first part of this guide shows how to install and load the interface through the R console. The second part shows a rapid overview of the interface and its possibility. As an example, the dataset ‘SRNDunkerque.csv’ will be used (data available in the package). This dataset regroup salinity, temperature and chlorophyll-a concentration sampled at 3 different stations (onshore to offshore) near the Gravelines Power Plant from 1995 to 2010 with a fluctuated frequency sampling (~ between 7 days and 1 month). The third part shows a more detailed documentation of the interface functioning using the same dataset.

A. Installing R and the TTAinterfaceTrendAnalysis package

The **TTAinterfaceTrendAnalysis** package needs the basic R console to be installed and launched. It is written with R version 2.14 and is compatible with the most recent version. R software (at least v2.14) comes with basic packages and a command console which can be downloaded from the CRAN website <http://cran.r-project.org/>. The **TTAinterfaceTrendAnalysis** package was created with the Tcl/Tk toolkit included in the tcltk package which is a part of the standard R installation for Windows, Linux and Unix platforms. For Mac OS X compatibility it is necessary to install an X Windows version of Tcl/Tk (<http://cran.r-project.org/bin/macosx/tools/>). More complete instruction concerning R installation can be found on the CRAN website.

Installation of a portable version of the package

Once R install, run it and go in the ‘Packages’ menu of the console, click on ‘Install package(s) from local zip files...’ (step 1 in Fig. 1) and select the file ‘TTAinterfaceTrendAnalysis_1.03.zip’ that comes in the provided zip archive. The TTAinterfaceTrendAnalysis package will automatically download and install all other necessary packages if they are not already present in your computer (Fig. 2) (you obviously need an internet connection).

Installation from CRAN mirror

Alternatively, the package is available on the CRAN mirror (an internet connection is obviously needed). Open the R console and click on ‘Install package(s)’ in the ‘Packages’ menu of the console (step 2 in Fig. 1), select your mirror (your country), and follow the instructions to find the **TTAinterfaceTrendAnalysis** package.

Launch the interface

When everything is installed click on ‘Packages/Load package...’ in the ‘Packages’ menu of the console and select **TTAinterfaceTrendAnalysis** from the list (step **3** in Fig. 1). A small panel appears inviting you to start the interface (Fig. 2B), click on the button. The step **1** or **2** need to be done only once to install the package, skip it and go directly to step **3** every time you need to load the interface. If closed, the GUI can be directly re-launch using the start panel.

In some case, if you close both the GUI and the start panel, and try to reload them with step **3** without closing the R console, the GUI would not start. Then you have to re-start the R console or if you want to stay in your R session, enter the line `TTAinterface()` in the console (Fig. 1).

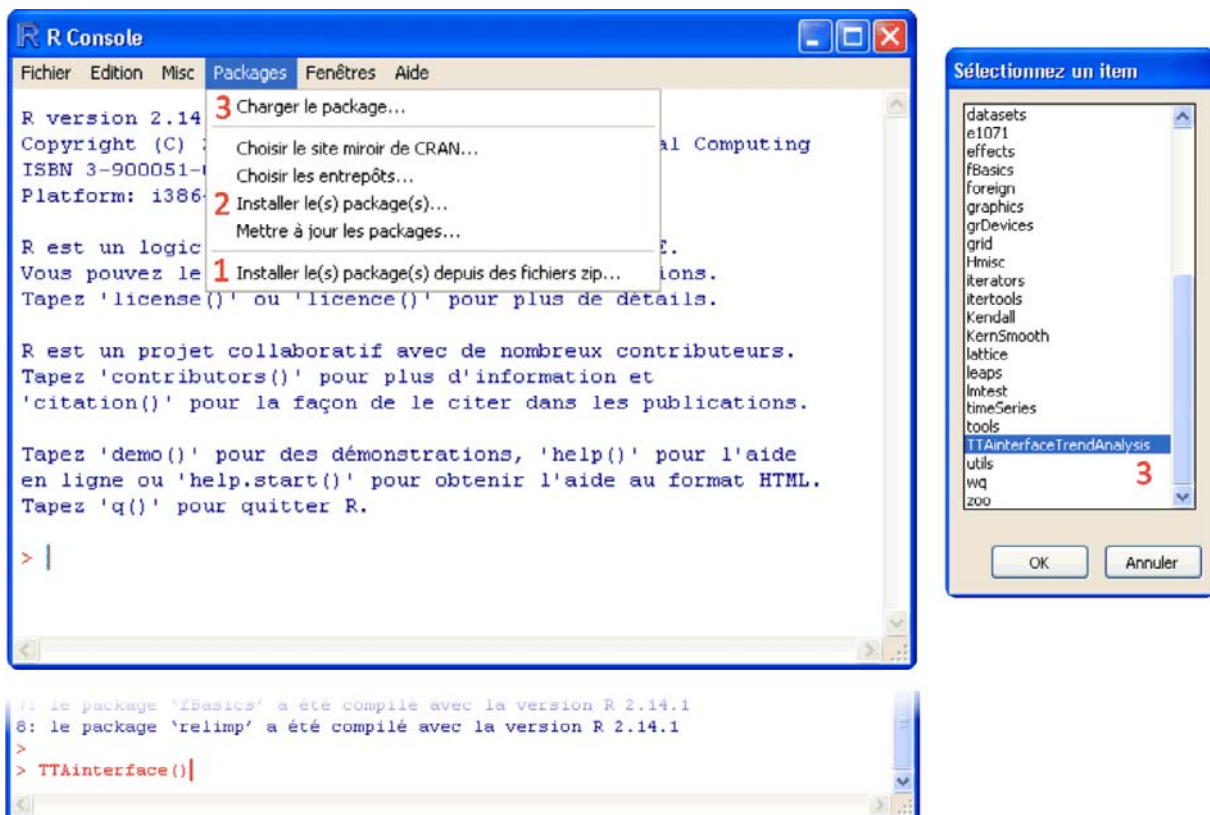


Figure 1. The R console and the different step to install and run the **TTAinterfaceTrendAnalysis** package.

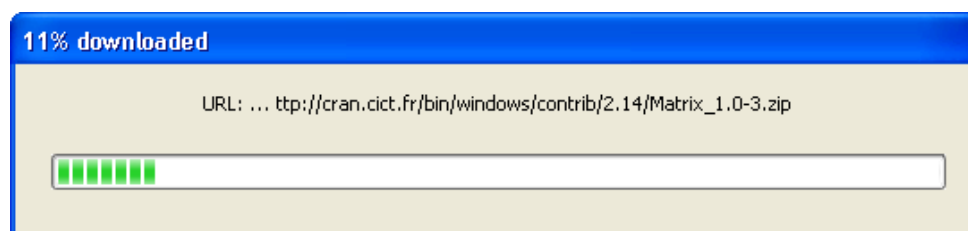


Figure 2A. Packages auto-downloading window.



Figure. 2B. Start panel of the **TTInterfaceTrendAnalysis** package.

B. Create your dataset

The datasheet format that is read by the **TTInterfaceTrendAnalysis** package is csv file. The main ‘difficulty’ to use the GUI is to prepare a csv file that is correctly read by the programme. Once in the interface, the guideline to perform analyses is very friendly.

The csv file has to be created with a spreadsheet software like Microsoft Excel or OpenOffice Calc. OpenOffice Calc is freely available (<http://www.openoffice.org>) and can manage files with 1 million lines whereas old versions of Microsoft Excel (before Excel 2007) is limited to 65500 lines but is more intuitive to use. The csv file is a numeric table with column label in the first row. For interface needs, some of these labels have to be defined and fixed. The column containing the sampling stations must be named STATIONS (with capital letter), DATES for the date column in format dd/mm/yyyy, DEPTH for the sampling depth column and S for the salinities column (Fig. 3). Columns with parameters values (chlorophyll, nutrient, phytoplankton...) can be freely labelled with the name of the parameters as a preference. All values in the same line must correspond to a unique sampling. Contrary to S and DEPTH columns, STATIONS and DATES columns are necessary for the interface to work correctly (if you do not have stations, create the appropriate column and file it with a character of your choice, ex: N in figure 3).

Formatting a csv file using Microsoft Excel,
OpenOffice Calc or equivalent

Column strict labelling:

	A	B	C	D	E	F	G
1	STATIONS	DATES	T	S	CHL	DEPTH	
2	N	11/02/1985	-1.3	32.35	7.18		
3	N	19/03/1985	2.4	33.31	11.21		
4	N	26/03/1985	4.5	31.39	27.9		
5	N	02/04/1985					
6	N	09/04/1985	7.9	28.19	21.76		
7	N	19/04/1985					
8	N	24/04/1985	7.9	32.35	15.72		
9	N	02/05/1985	7.4	32.03	9.74		
10	N	09/05/1985	10.3	32.99	13.89		
11	N	14/05/1985	10.2	33.31	9.59		
12	N	20/05/1985	12.9	33.63	33.16		
13	N	23/05/1985	14.4	32.48	28.4		
14	N	29/05/1985	14.5	32.67	45		
15	N	03/06/1985	16.1	33.31	34.4		

Date format: dd/mm/yyyy

Missing value = empty case

Figure 3. Summarized processes to formatting a csv file readable in the **TTInterfaceTrendAnalysis** package.

In your csv file you can keep columns that will be not used in the interface like coordinates or water masses labels (they will not be read by the program) but it is recommended to remove them to obtain the lighter csv file.

Missing values must be empty case, 0 are read as values and characters (NA, NaN) can induce bugs (they are labelled by the program itself so you don't have to do it).

Decimal separator must be '.' (dot). Be careful with the value that appear like 6,00 (integer value with comma as decimal separator), they are not always replaced by 6.00 in Microsoft Excel.

Once your datasheet have been well prepared, save it using 'save as' (1 in Fig. 4A and Fig. 4B) and select CSV (Comma delimited) (*.csv) in the 'Save as type' option (2 in Fig. 4A and Fig. 4B). In OpenOffice Calc you have to check 'Edit filter settings' to select ';' as column separator in step 4 (Fig. 4B). In step 4, let also the 'Text delimiter' case empty.

Between step 2 and 4 OpenOffice Calc will ask you if you want to keep the actual format, check yes (3 in Fig. 4B).

Only one worksheet can be saved in a csv file (the active one by default).

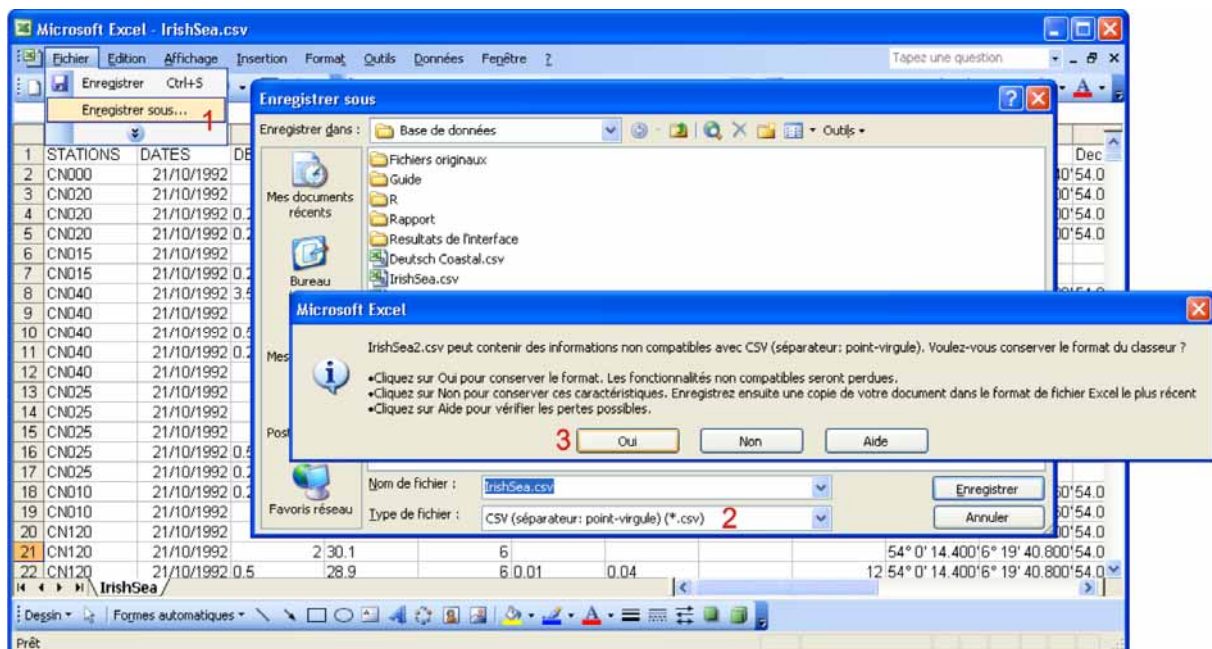


Figure 4A. Creating a csv file with Microsoft Excel.

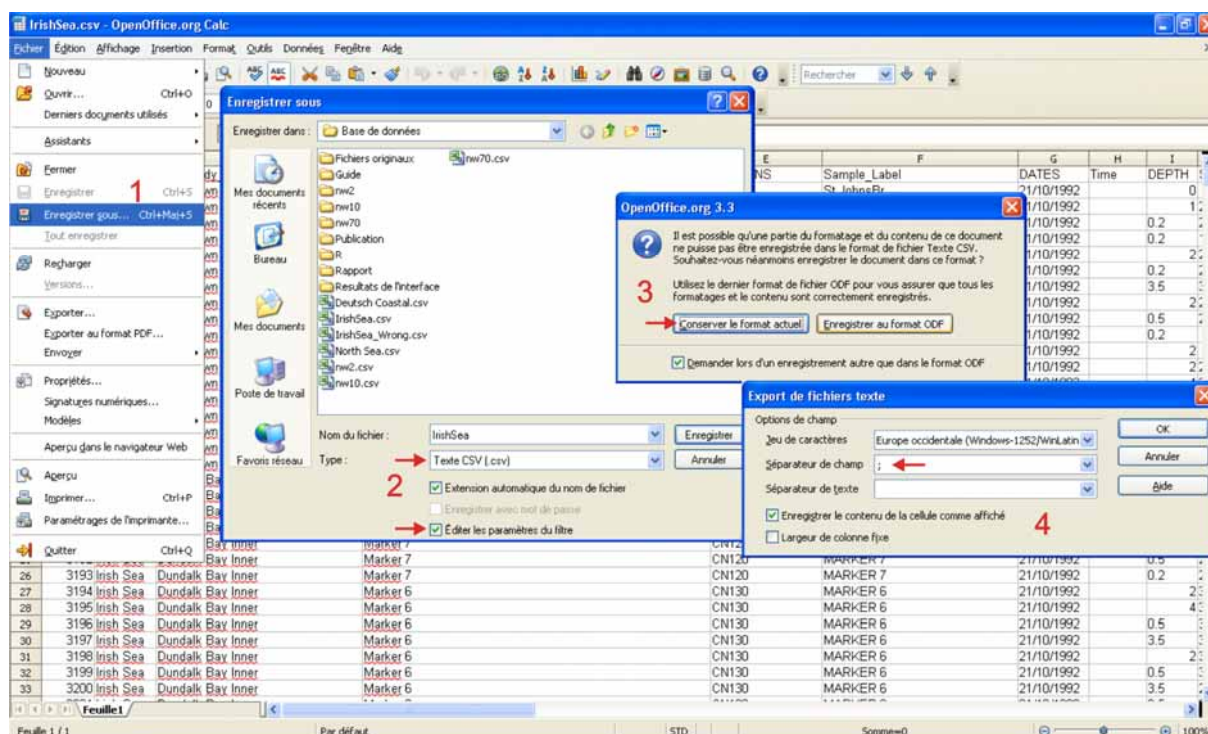


Figure 4B. Creating a csv file with Open Office Calc.

To summarize:

- Must be a .csv file
- Column labelling : STATIONS for sampling stations, DATES for dates, S for salinity and DEPTH for depths values.
- Dates format must be dd/mm/yyyy
- Dot as decimal separator
- Missing values must be empty cases

C. Quick steps

1. Managing your database

The first panel of the interface ‘1-Data_managment’ allows interactions with the dataset

Import your database

This is the first page you can see when you start the interface (Fig. 5). You can only import a csv file (or the data example file, **2** in Fig. 5) using the <Import CSV File> button (**1** in Fig. 5) and read the advice to correctly import a csv file. All other options are disable.

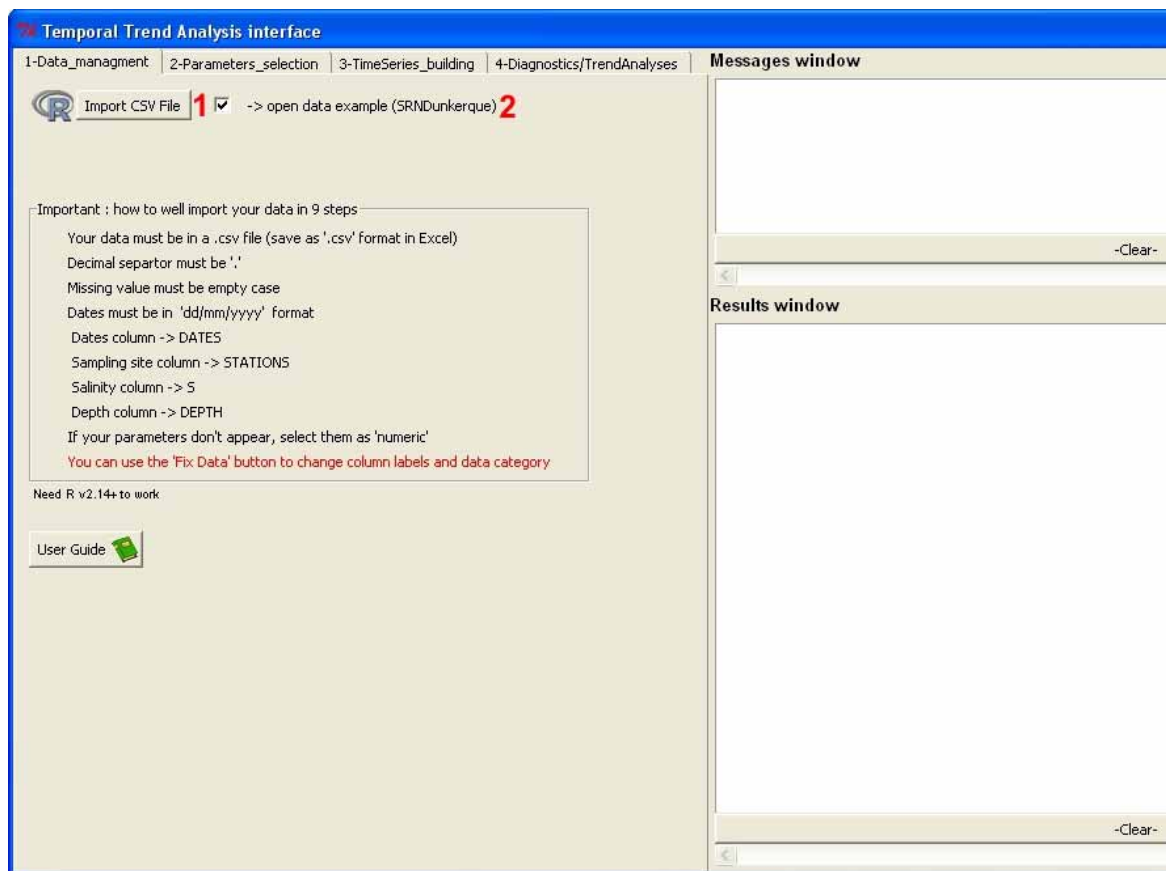


Figure 5. Panel 1 when the interface is launch.

Once your csv file is imported more options appear:

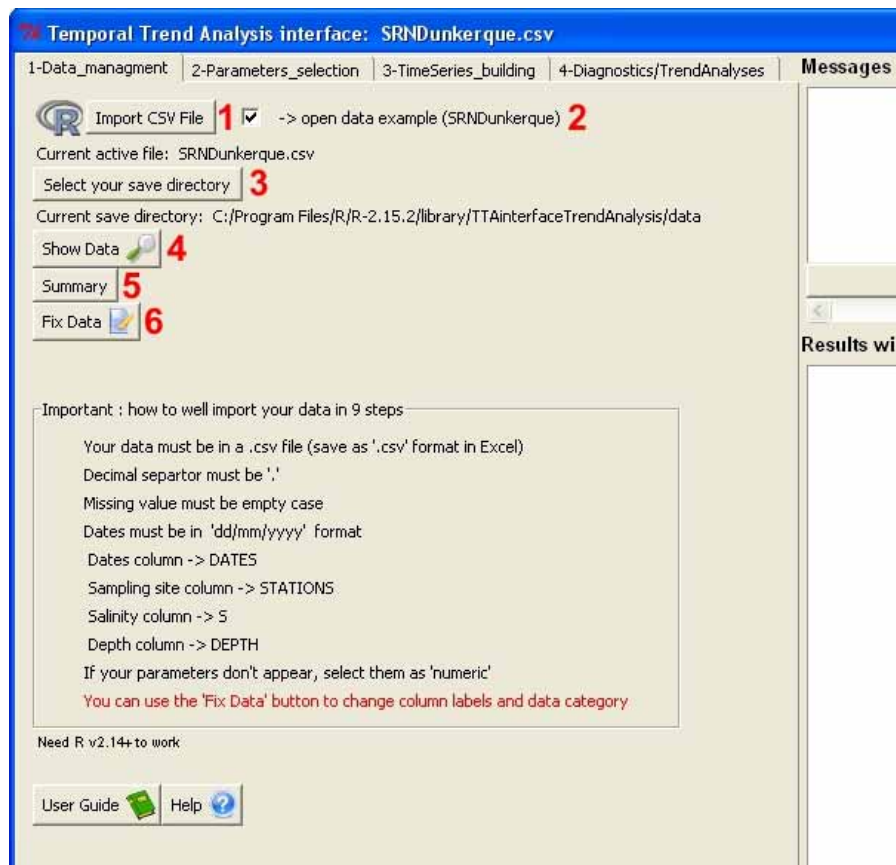


Figure 6. Left part of the Panel 1 once a csv file is imported (here the data example).

Change the save directory

The button <Select your save directory> (3 in Fig. 6) let you choose a folder on your computer to save the different figures and results of analysis you will obtain with the interface. By default this is the folder where your imported csv file is stock. If you import a new csv file the save directory is reset to default.

Display your data

The button <Show Data> (4 in Fig. 6) displays a table of your imported data.

Summarize your raw dataset

The button <Summary> (5 in Fig. 6) displays a table with the main descriptive statistics of your raw data (Fig. 7) with Min. = minimum value of the distribution, 1st Qu. = first quantile (25%), Median = the median of the distribution (50%), Mean = the mean of the distribution, 3rd Qu. = third quantile (75%), Max. = maximum value of the distribution and NA's = number of missing values in the distribution of the parameter.




Stat2												
	STATIONS		DATES		T		S		CH			
1	B	: 684	01/09/2003:	7	Min.	: -2.000	Min.	: 0.12	Min.	: -0.090		
2	L15:	222	06/08/1997:	6	1st Qu.:	7.397	1st Qu.:	26.10	1st Qu.:	3.844		
3	L16:	229	09/08/1995:	6	Median	: 14.000	Median	: 29.30	Median	: 7.180		
4	L2	: 164	10/06/2003:	6	Mean	: 12.573	Mean	: 28.34	Mean	: 10.748		
5	L9	: 267	18/08/2003:	6	3rd Qu.:	17.500	3rd Qu.:	31.00	3rd Qu.:	13.046		
6	N	: 1187	(Other)	: 2922	Max.	: 24.400	Max.	: 54.50	Max.	: 265.320		
7	W	: 201	NA's	: 1	NA's	: 310.000	NA's	: 180.00	NA's	: 171.000		

Figure 7. Resume of the 'SRNDunkerque' raw database.

Edit your data

The button <Fix Data> (6 in Fig. 6) let you edit your dataset directly from the interface (Fig. 8). However you can only perform simple tasks such as modifying column label, modifying data category or editing cases one by one. For more complex modification, use a spreadsheet software.

Click on the column label case


Save the modifications and back to the interface

Modify variable name

Modify variable category

Figure 8. Data editor spreadsheet when using the <Fix Data> button in panel 1.

If you import a csv file containing a column labelled 'S' for salinity but with values that are not identified as 'numeric' a warning message appear (same thing for DEPTH column):

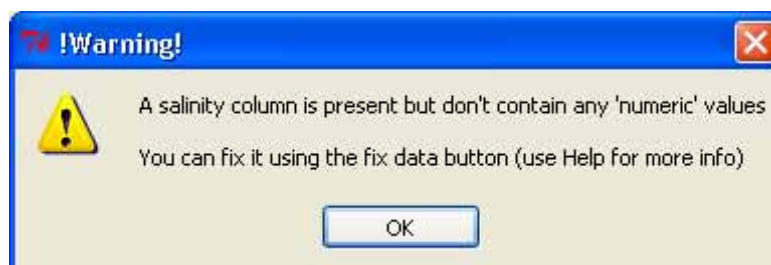

2. Select your parameters

The second panel of the interface ‘2-Parameters_selection’ allows selecting the desired parameters for analysis (number corresponding to figure 9):

1. The different sampling stations
2. If data of each station have to be put together during analysis
3. The parameter to analyse
4. Interval of salinity to analyse (sliders)
5. Interval of depth to analyse (if exist)
6. Interval of years to analyse
7. Months to analyse (must be spaced)

Summarize your selected parameters

The button <Resume> (8 in Fig. 9) displays descriptive statistics of the raw selected data. No mathematical treatment has been done on this data, only simple selection and sorting.


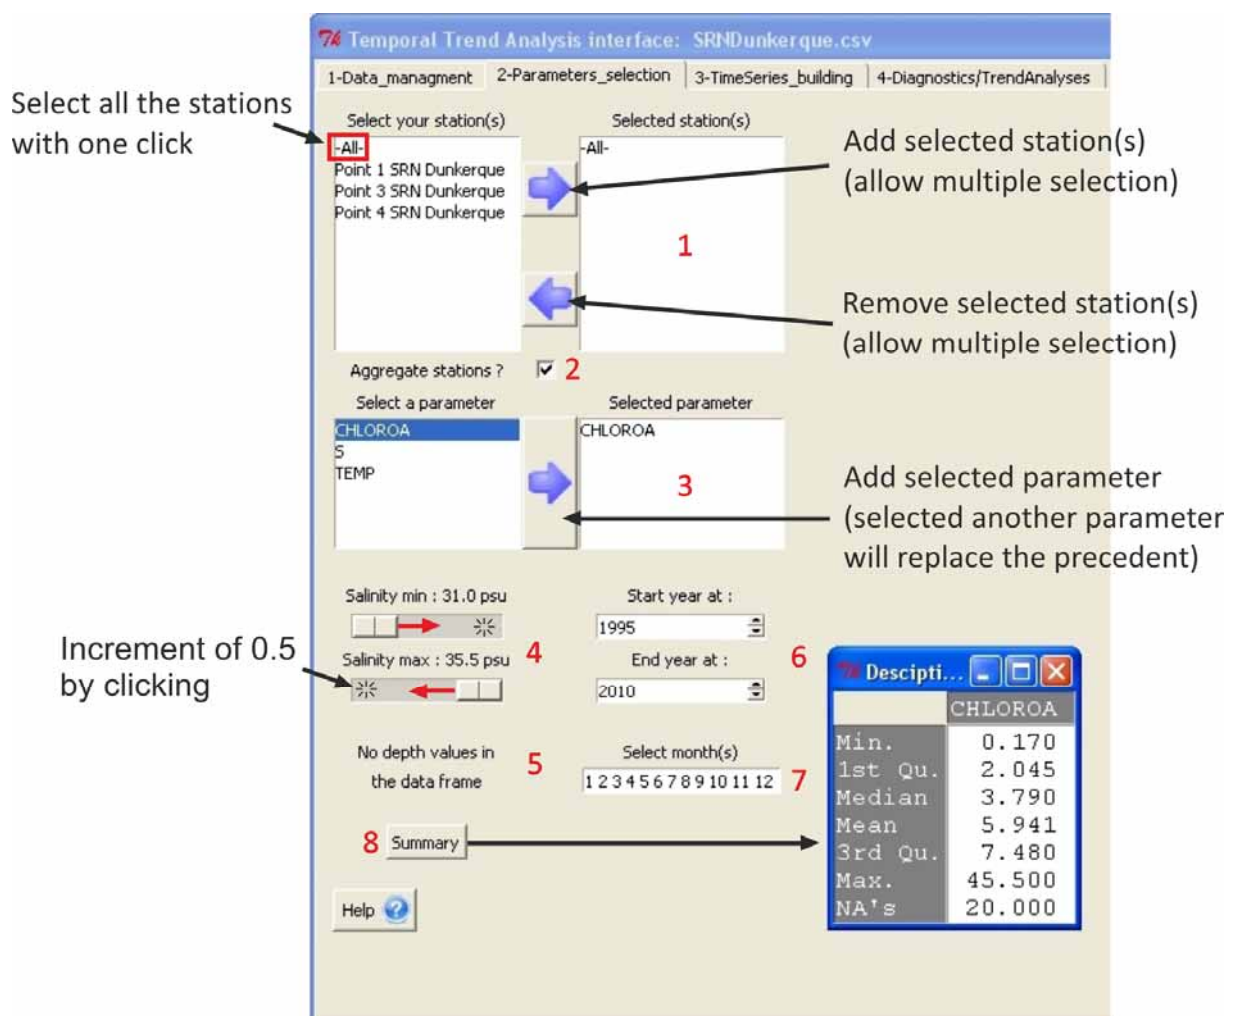


Figure 9. Options in the panel 2.

The following warnings appear if you didn't select any parameter or station before performing a mathematical treatment:



Also if the combination of salinity and depth selected in 4 and 5 (Fig. 9) is irrelevant:

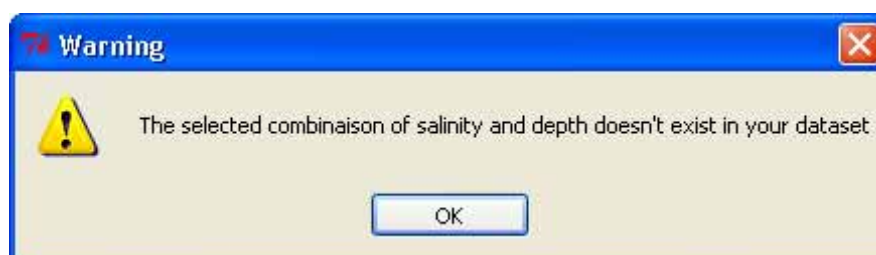

3. Build your time series

The third panel ‘3-TimeSeries_building’ allows building a regularized time series which is necessary to perform temporal trend analysis (Fig. 10).


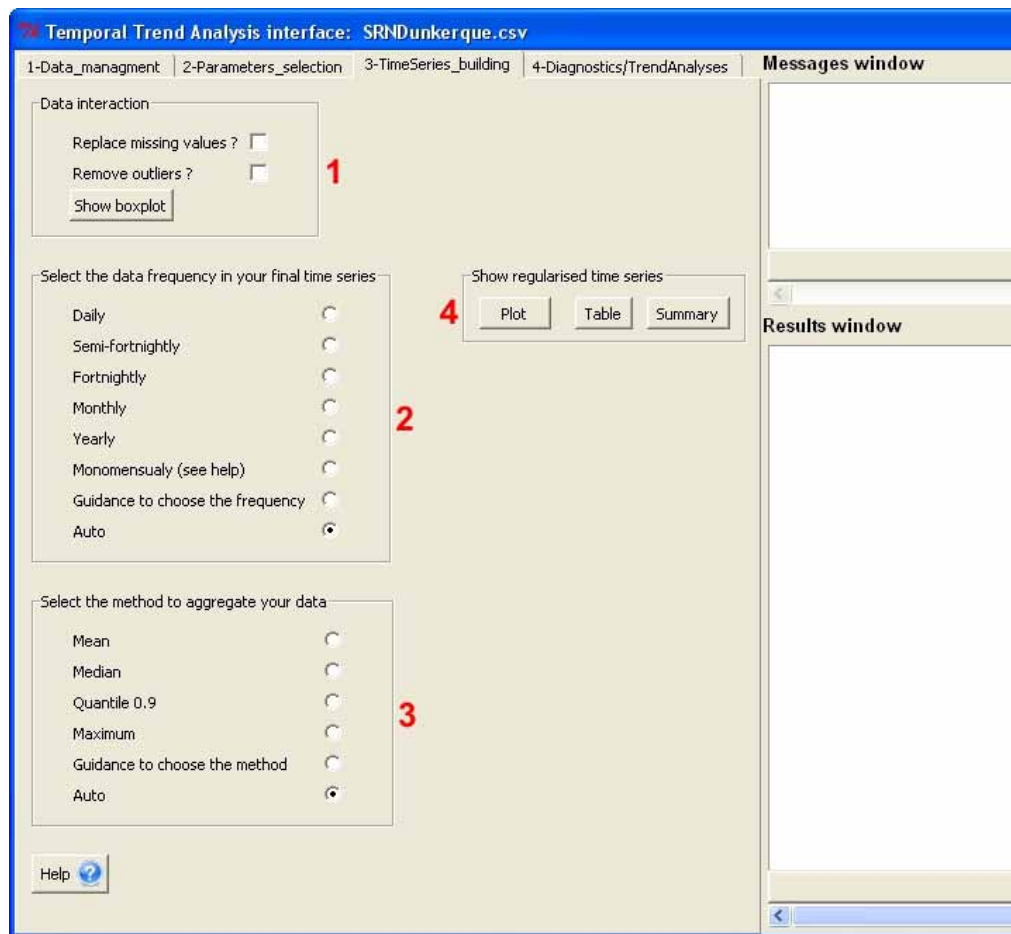


Figure 10. Options in the panel 3.

Outliers and missing values

The ‘Data interaction’ frame (1 in Fig. 10) allows to remove outliers from the raw data distribution and to replace missing values from the time series (require for some diagnostic processes). A warning message appears if you choose to replace missing values and if they represent more than 5% of your data:

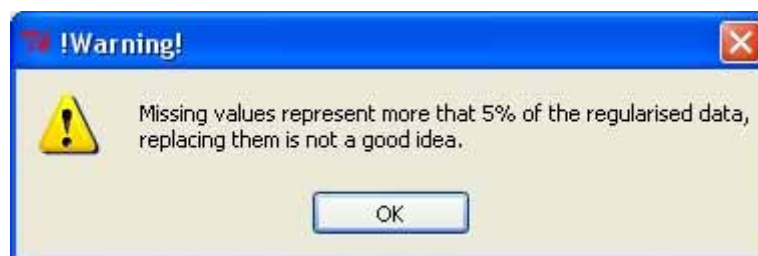

The button <Show boxplot> displays a boxplot of your data distribution, by years, with outliers (Fig. 11).

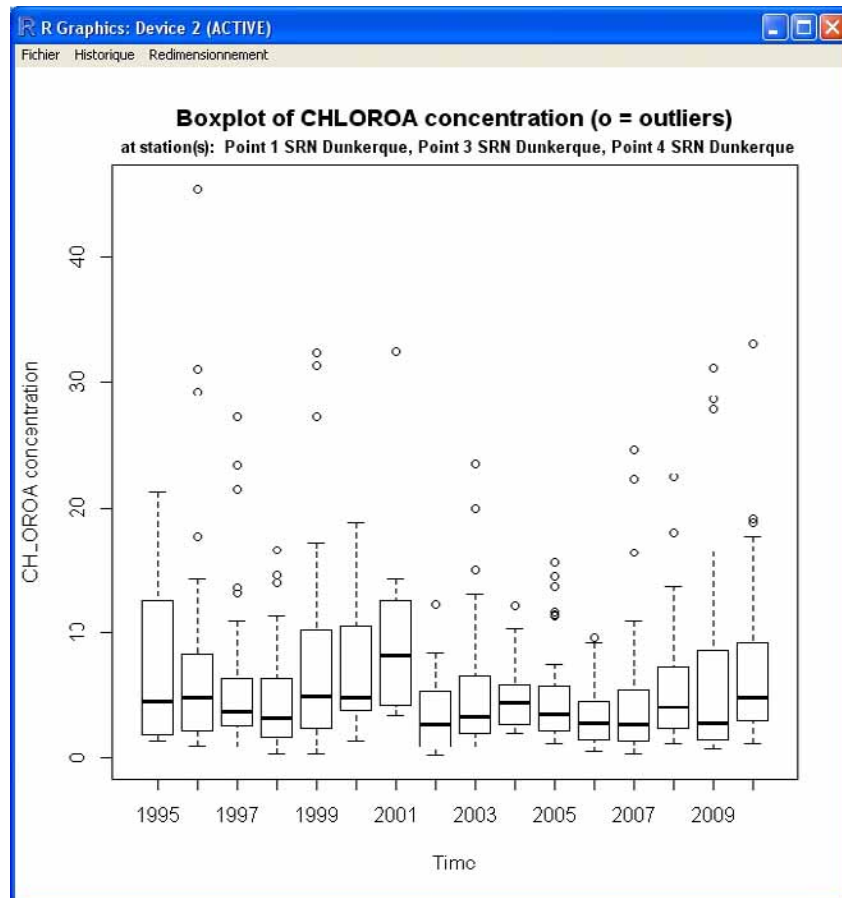


Figure 11. Boxplot of the 'SRNDunkerque' raw database with outliers

Aggregation methods

Frame 2 and 3 in Fig. 10 show the options to build your regularized time series. You can select the time step and the method of data aggregation or let the interface select it automatically for you (default option). The auto option computes balanced choices, alternatively select guidance option to see the advices before choosing (Fig. 12).

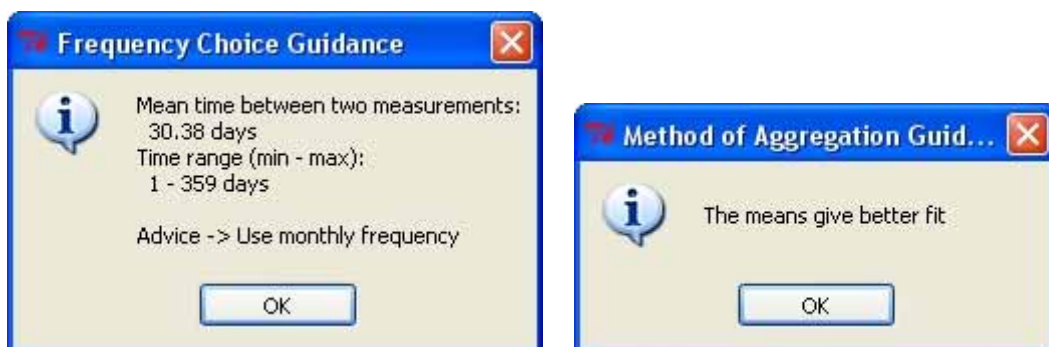


Figure 12. Messages to choose balanced frequency and method of aggregation to build time series.

Frame 4 allows displaying a plot, a table or a resume of the regularized time series build with your selected options (Fig. 13). Plot and table are automatically saved when called.

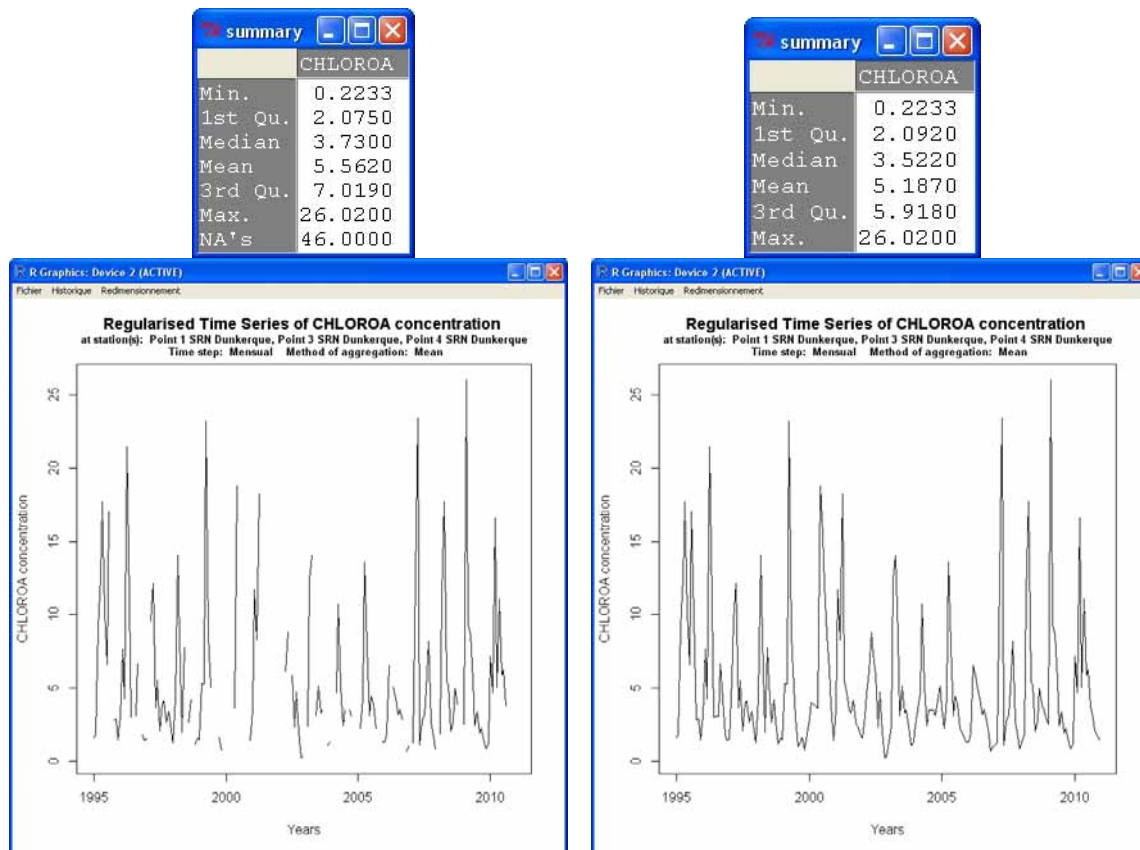


Figure 13. Summaries (top) and plots (bottom) of regularized time series with missing values kept (left) or replaced (right).

4. Perform diagnostics and trend analyses

The forth panel '4-Diagnostics/TrendAnalyses' allow to perform diagnostics and temporal trend analysis on your regularized time series (Fig. 14).


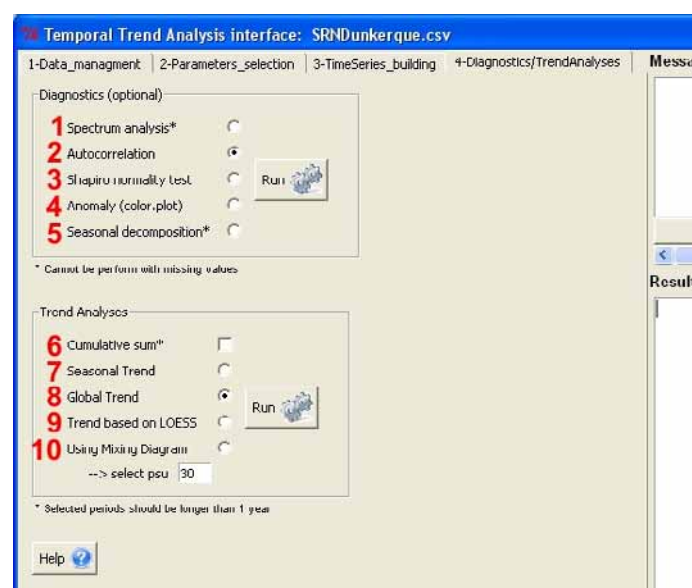



Figure 14. Options in the panel 4.

Diagnostics tools (first frame), numbers correspond to those of Fig. 14.

1. Fourier spectral density
2. Autocorrelation diagram
3. Shapiro Normality test
4. Anomaly by step time
5. Time series decomposition

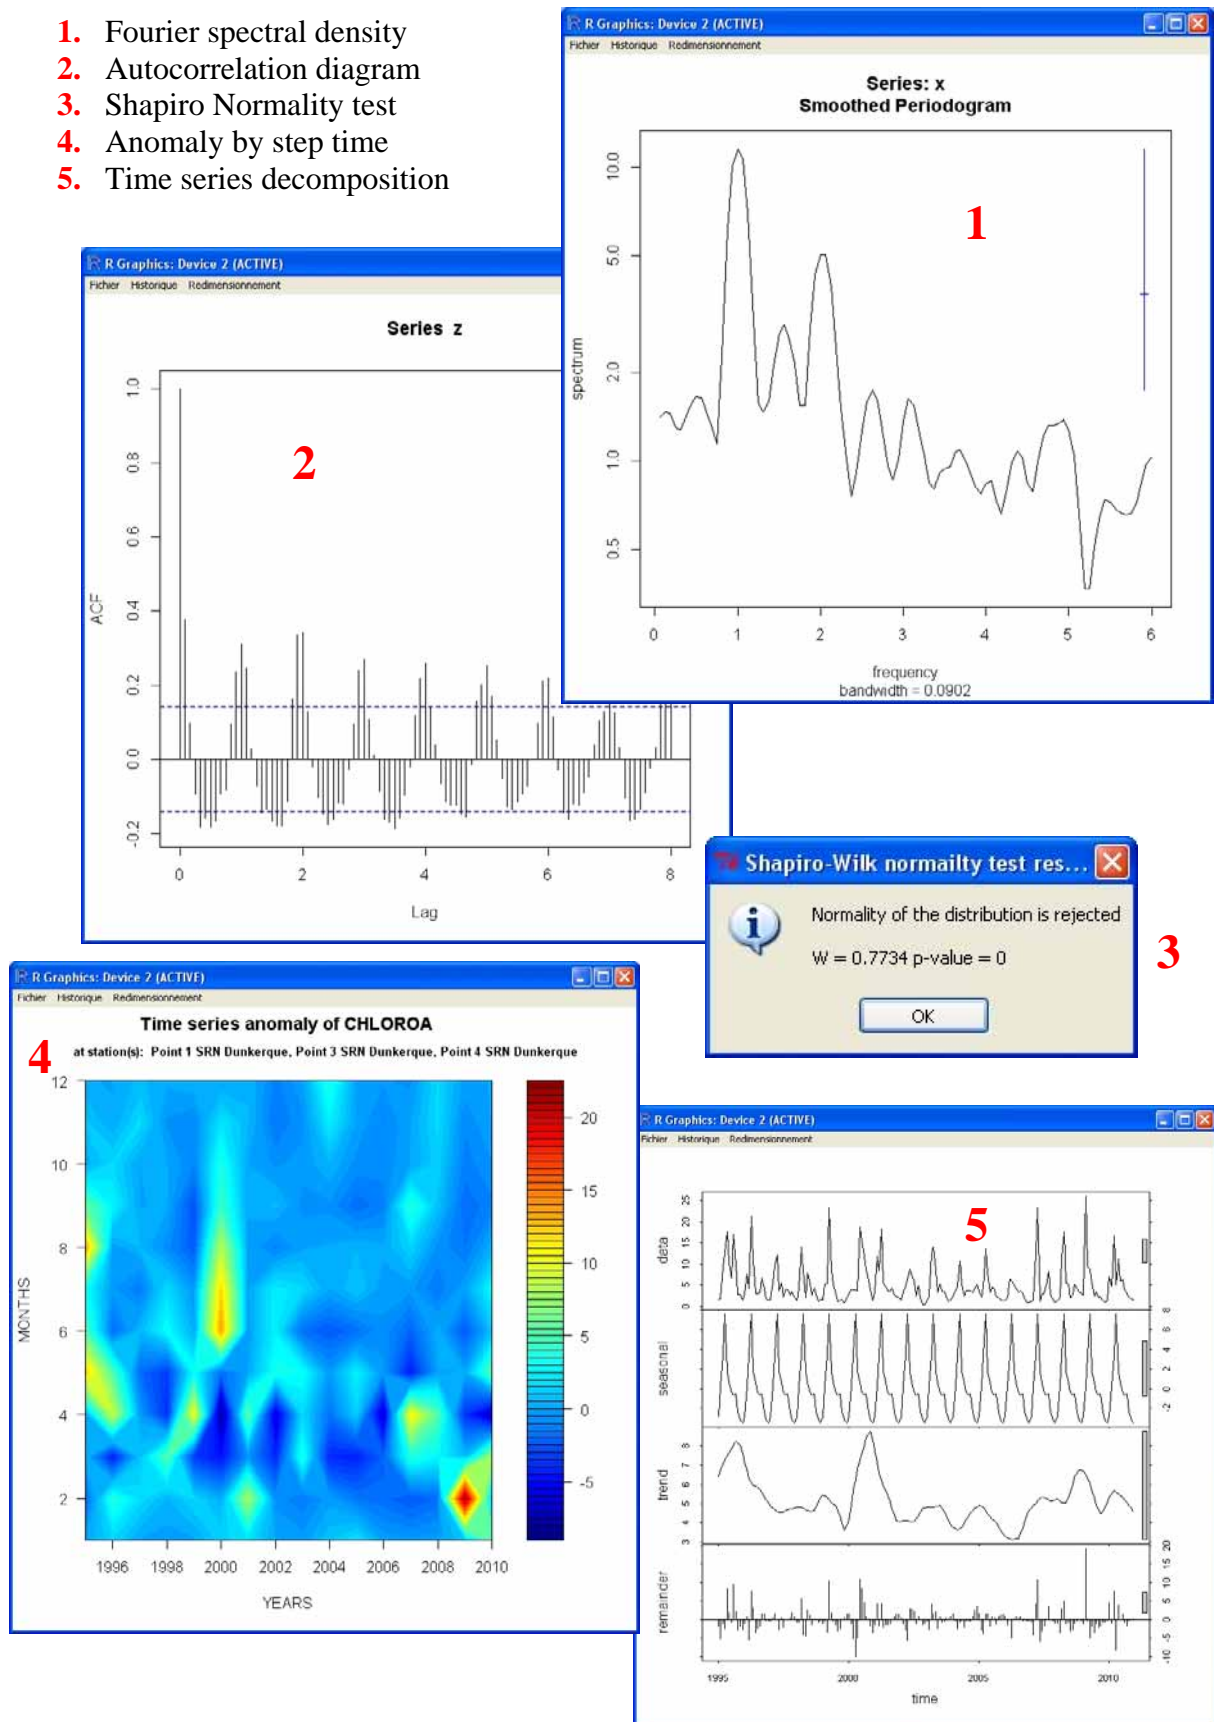

Performing diagnostics **1** and **5** while keeping missing values displays warning messages:

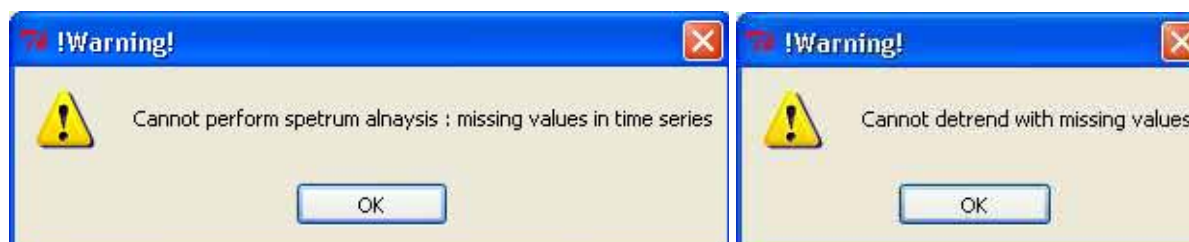

Temporal trend tests (second frame)

- Global trend (**8** in Fig. 14 and 15) and Seasonal trend (**7** in Fig. 14 and 15) (both based on Seasonal Kendall test) results are display on the right par of the interface (Results/Messages):

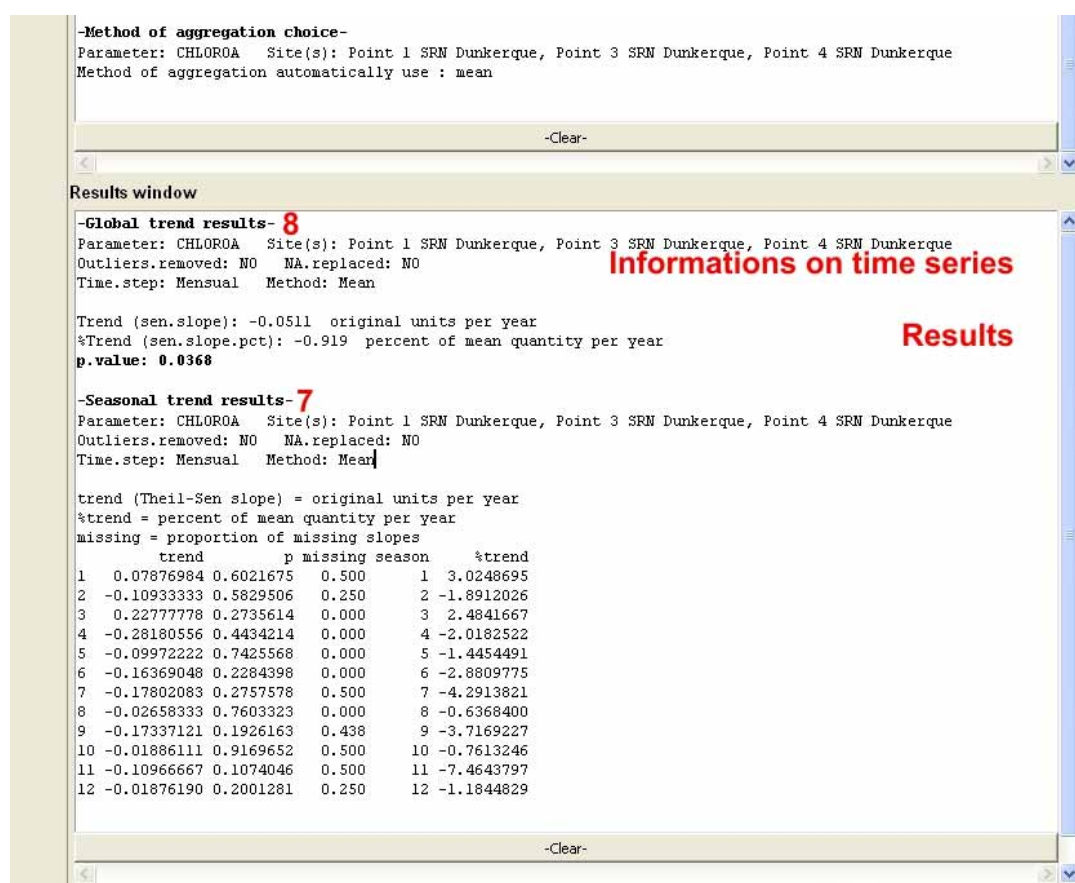


Figure 15. Results of temporal trend test (Global Trend in **8** and Seasonal Trend in **7**) display in the right part of the interface.

- Visually identify and select different periods of trend with Cumulative sum (6 in Fig. 14, Fig. 16)...

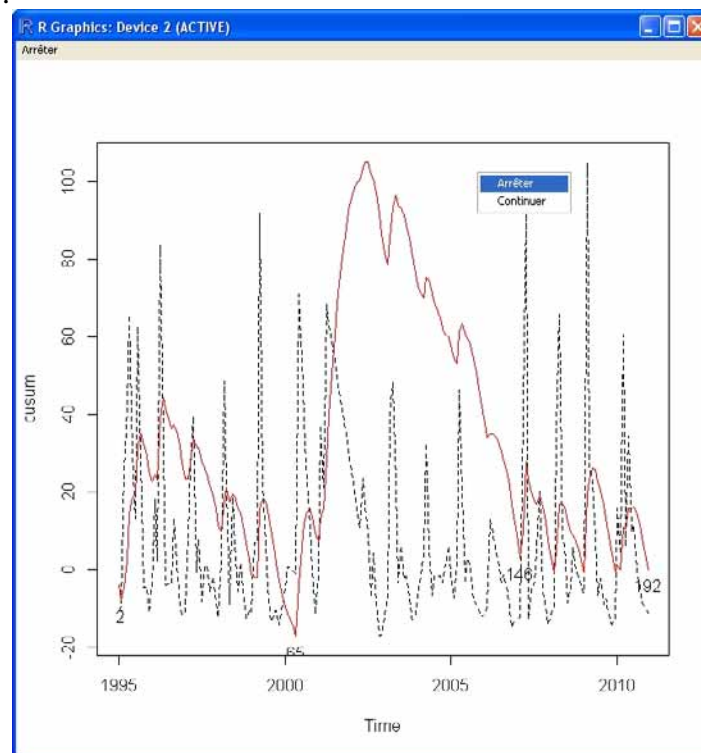


Figure 16. Cusum plot (cumulative sum in red), with periods manually identified (numbers).

...and perform Kendall test on each of these periods (Fig. 17):

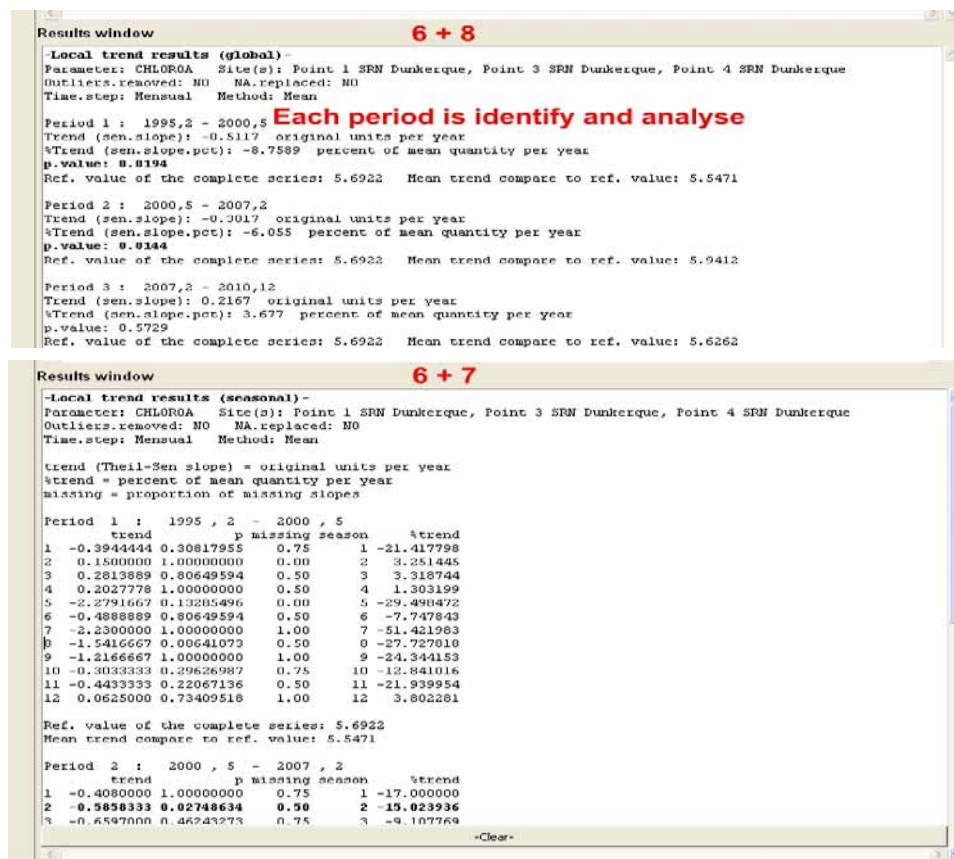


Figure 17. Results of Kendall tests perform on the different periods identified with cusum plot .

The following warning message is display if you select another test than Kendall after choosing the Cumulative sum option:



- Trend based on LOESS smoothing (9 in Fig. 14):

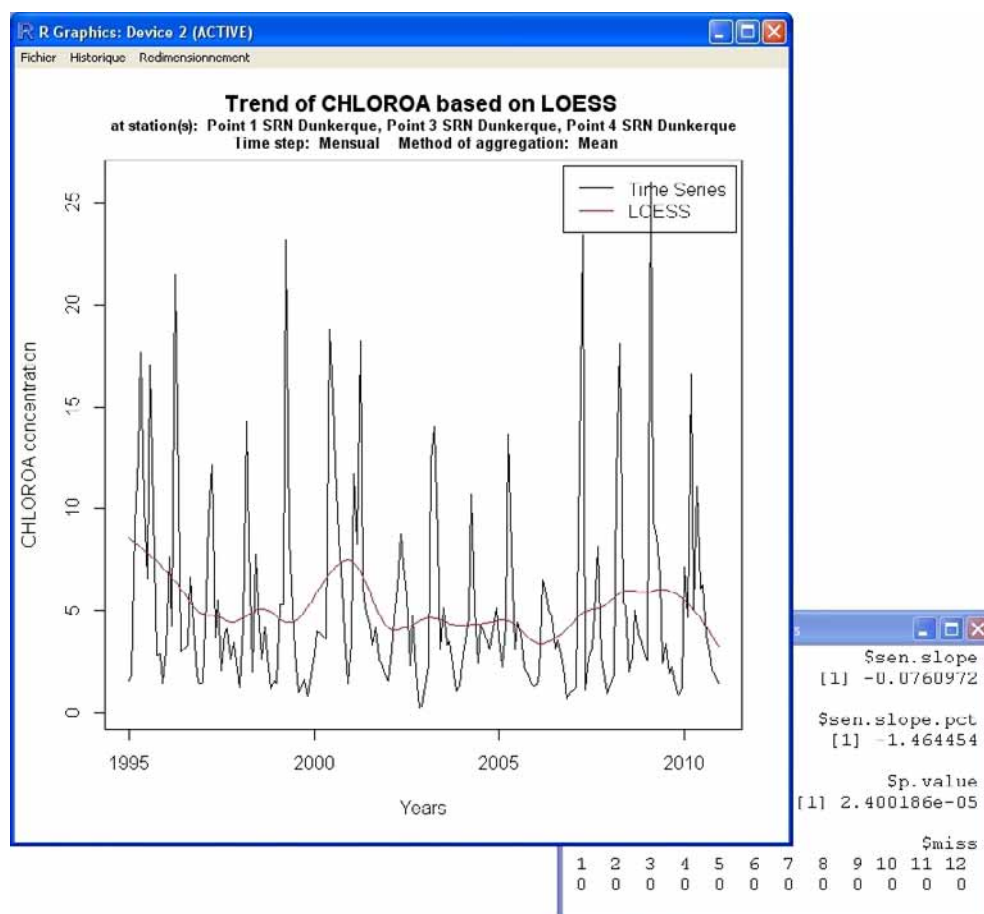


Figure 18. Plot of the regularized time series (black line) with loess smoothing (red line)

Results window

-Global trend results on LOESS-

Parameter: CHLOROA Site(s): Point 1 SRN Dunkerque, Point 3 SRN Dunkerque, Point 4 SRN Dunkerque
Outliers.removed: NO NA.replaced: YES
Time.step: Mensual Method: Mean

Trend (sen.slope): -0.0819 original units per year
%Trend (sen.slope.pct): -1.5862 percent of mean quantity per year
p.value: 0

Figure 19. Results of temporal trend test (Global Trend) apply on loess smoothing, display in right part of the interface.

- Trend based on normalized concentration of nutrients at fixed salinity for each month (10 in Fig. 14):


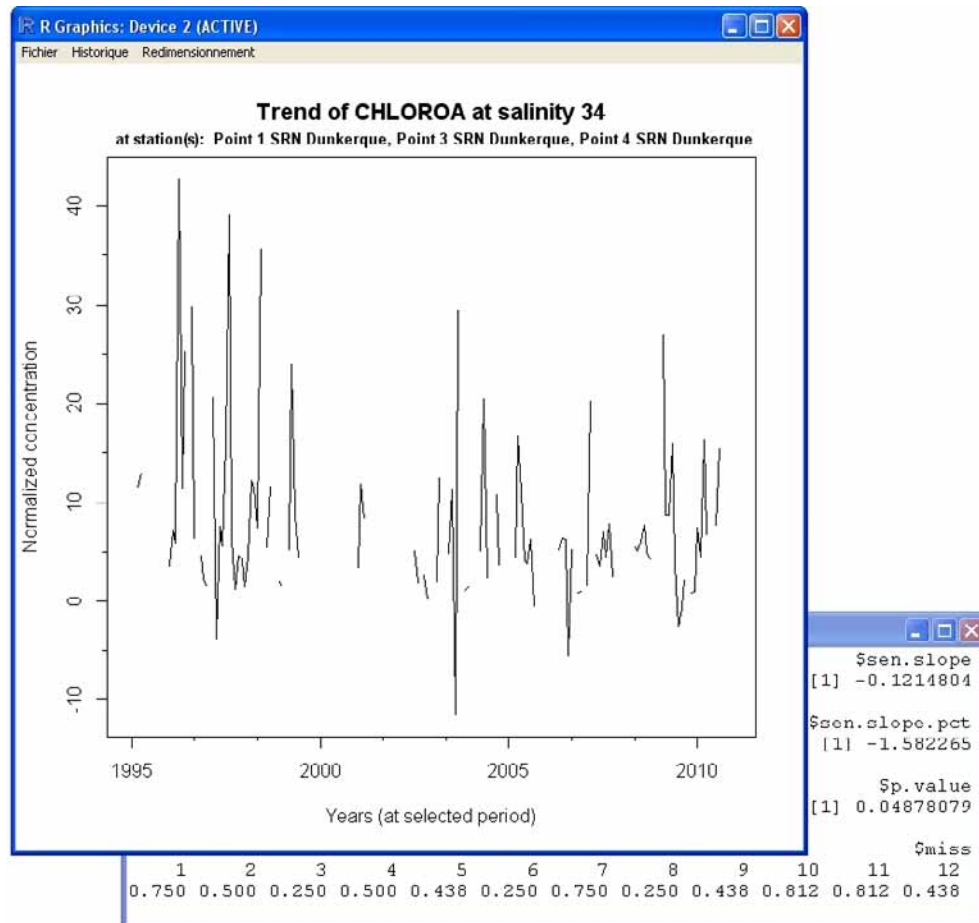


Figure 20. Plot of normalized chlorophyll-a concentration at salinity 34 and results (text box in the background) of Global Kendall perform on this time series.

The following warning message is display if there is no salinity value in your data or if you choose a salinity to normalize nutrient over the maximum salinity of your dataset:

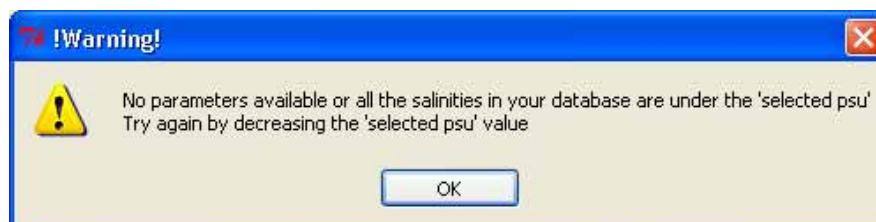

D. Detailed documentation

1. Interface organisation

The interface displays all the options needed to perform temporal trend analysis through 4 successive panels (4 steps), from raw data managing to results display.

The panel 1 “1-Data_management” focuses on the file and data management, it is the pre-processing part.

The panel 2 “2-Parameters_selection” focuses on the selection of the parameter and stations to analyse.

The panel 3 “3-TimeSeries_building” displays the option to build a regularised time series.

The panel 4 “4-Diagnostics/TrendAnalyses” focuses on diagnostic tools and statistics tests.

Results are displayed in the right part of the interface and are always visible.

Help buttons are available on each panel of the interface to provide guideline on how to use options in their respective panel.

The top panel displays the name of the selected data file (once imported).




Figure 21. Top panel and panels' titles of the interface.

The advantage of having panels against windowed menus is that all options are always visible and can be rapidly selected without going into multiple menus. This is only possible because the number of options is optimised to the minimum needed to perform such analysis. Such interface cannot be developed for more complex tools (which is not the objective of the interface).

2. Files and data managing panel

The first step of the data analysis is the importation of your database in the GUI. The interface identifies each column as a function of its label and category. In general columns with numeric values are automatically identified as parameters. Other columns have to be manually labelled to facilitate the identification by the GUI, such as sampling stations or depth (for further information see §B).

2.1 Import CSV file

To import a csv file containing your data just click on the button <Import CSV File> in panel 1, a window generated by your OS is displayed where you can select and open csv files (Fig. 22).

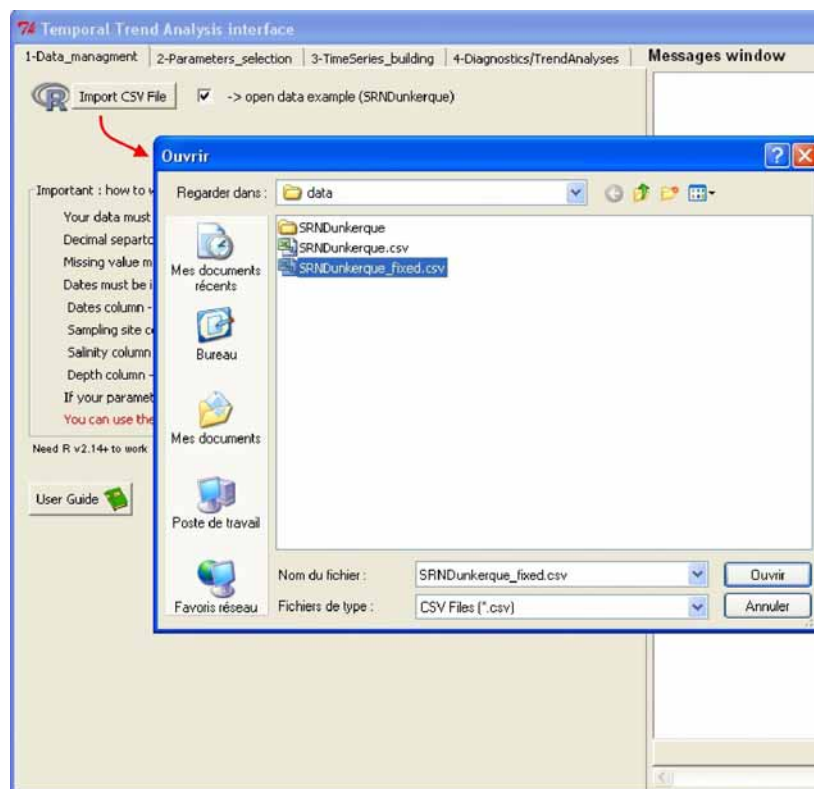


Figure 22. Panel 1 with the <Import CSV File> option and importation advices.

Until the file is imported panels 2 to 4 stay empty and panel 1 uncompleted. The other options are available only when your data are imported (Fig. 23).

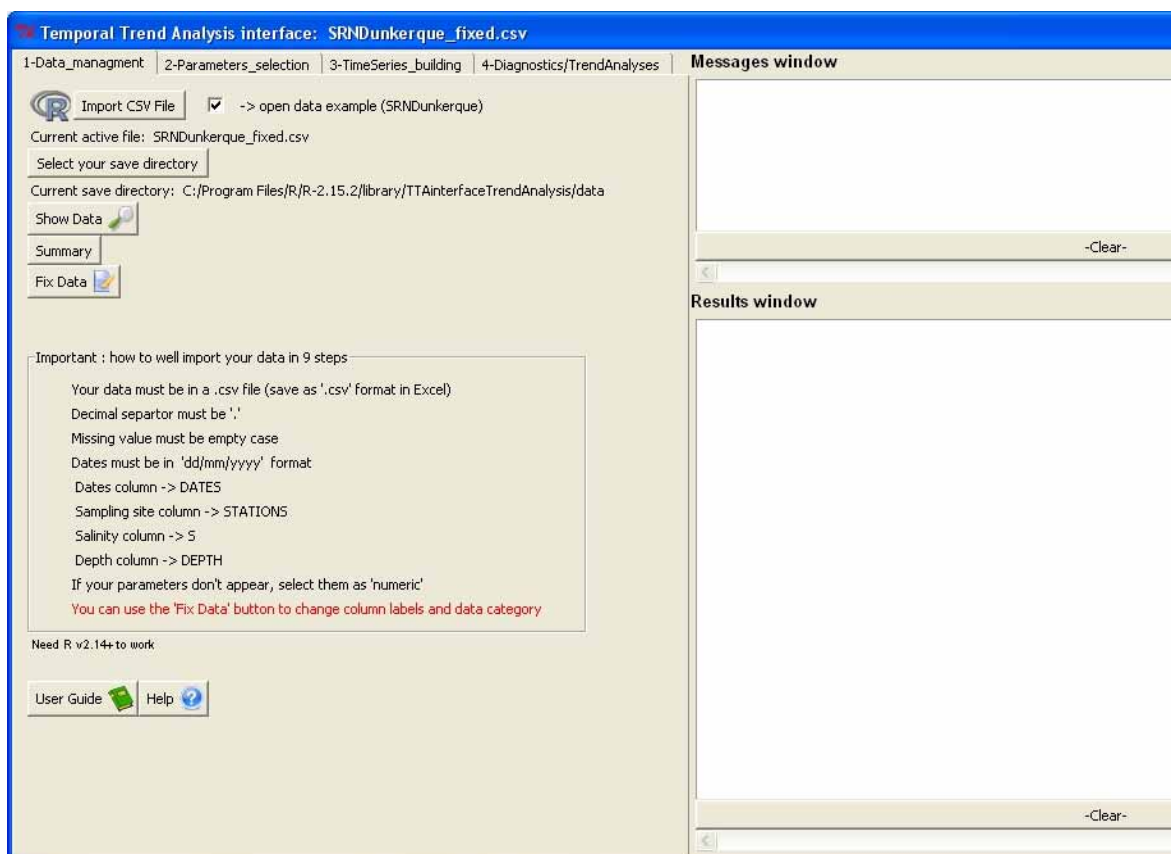


Figure 23. Panel 1 with all options available once csv file has been imported.

2.2 Select your save directory

By default, results of analysis and figures are saved in the same directory as your csv file, however if you want to save your results in a different folder just click on <Select your save directory> and choose a folder as follows:

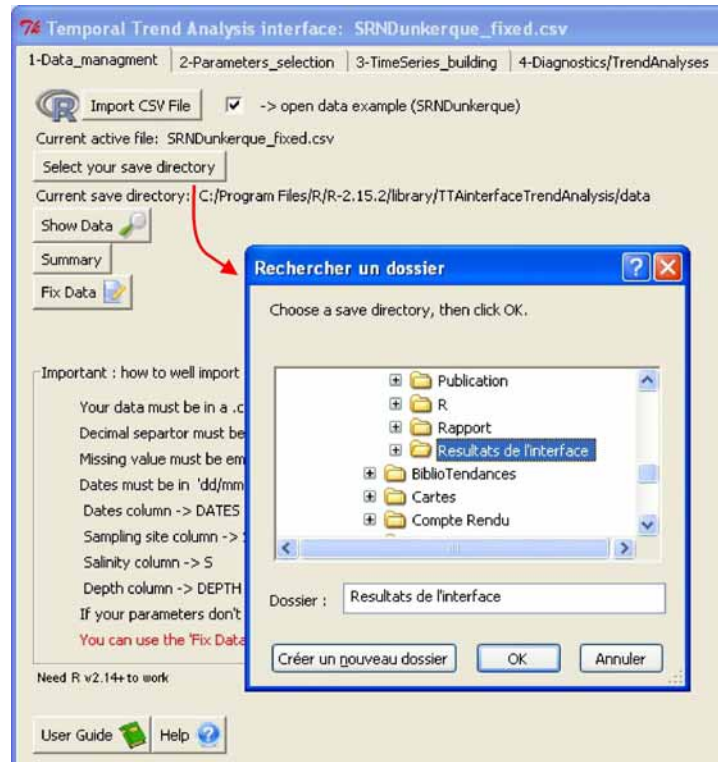


Figure 24. Panel 1 with the <Select your saved directory> option.

You can also directly create a folder through this window.

From this basal directory, the programme automatically creates an arborescence to save your files based on the options you choose to perform analyses (Fig. 25). Other options, such as Months, salinity and depths are not added in order to limit the arborescence declination and keeping a clear save path, therefore the user has to be careful to not overwrite its files (by changing the save directory destination) if these options are changed between two analyses.

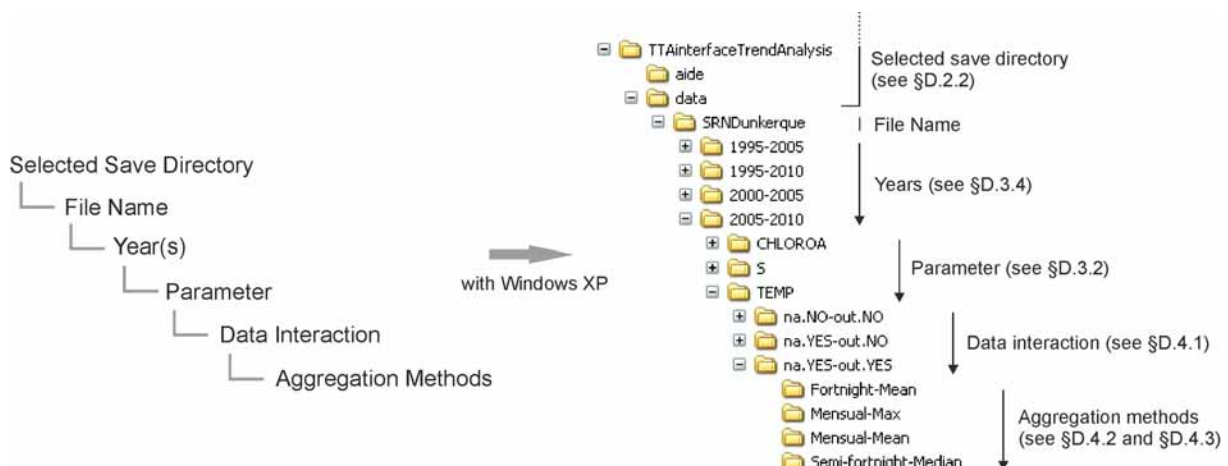


Figure 25. Example of a save path arborescence created as a function of selected options


Note that importing a new csv file will reset your basal save directory to default.

Saved files are named with a specific nomenclature:

OriginalName_TestName_ Parameter.csv / .png.


2.3 Display your raw data

You can check your imported data by clicking on <Show Data> button:

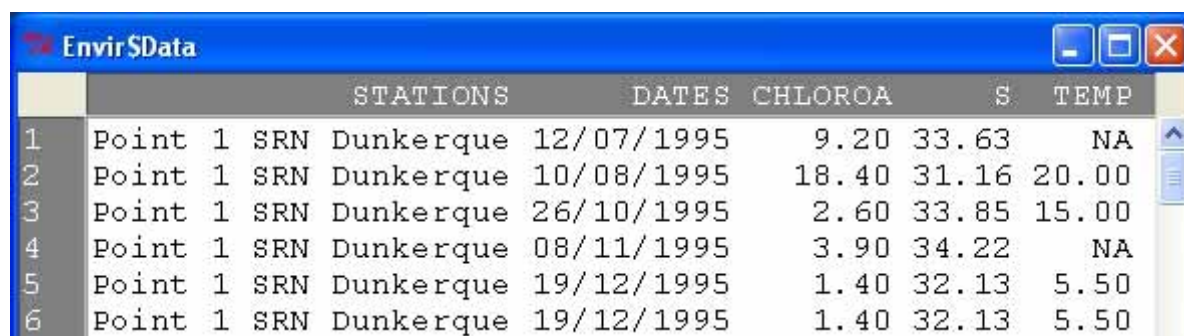

	STATIONS	DATES	CHLOROA	S	TEMP
1	Point 1 SRN Dunkerque	12/07/1995	9.20	33.63	NA
2	Point 1 SRN Dunkerque	10/08/1995	18.40	31.16	20.00
3	Point 1 SRN Dunkerque	26/10/1995	2.60	33.85	15.00
4	Point 1 SRN Dunkerque	08/11/1995	3.90	34.22	NA
5	Point 1 SRN Dunkerque	19/12/1995	1.40	32.13	5.50
6	Point 1 SRN Dunkerque	19/12/1995	1.40	32.13	5.50

Figure 26. A correctly imported data set view with the <Show Data> button in panel 1.

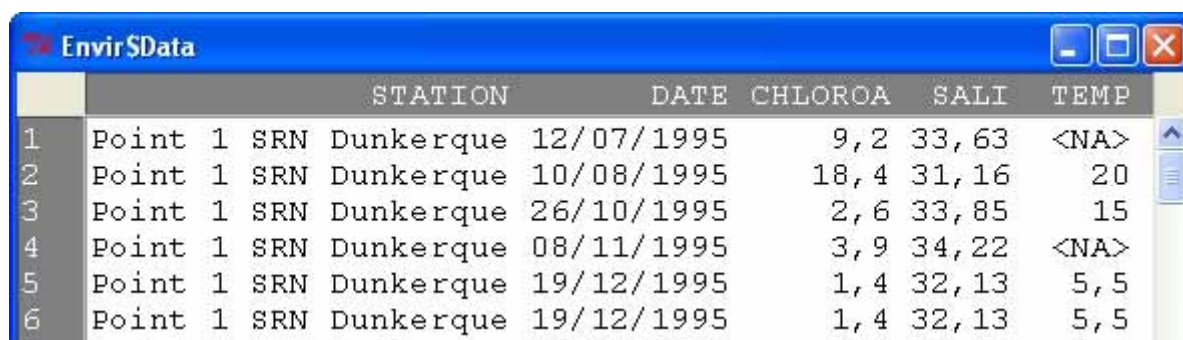

	STATION	DATE	CHLOROA	SALT	TEMP
1	Point 1 SRN Dunkerque	12/07/1995	9,2	33,63	<NA>
2	Point 1 SRN Dunkerque	10/08/1995	18,4	31,16	20
3	Point 1 SRN Dunkerque	26/10/1995	2,6	33,85	15
4	Point 1 SRN Dunkerque	08/11/1995	3,9	34,22	<NA>
5	Point 1 SRN Dunkerque	19/12/1995	1,4	32,13	5,5
6	Point 1 SRN Dunkerque	19/12/1995	1,4	32,13	5,5

Figure 27. Dataset with labels and decimal separator issues view with the <Show Data> button.

2.4 Edit your data – solve some importation issues

In case you have importations issues, you can edit your data with the <Fix Data> button.

There are two situations where data importation can be corrupted:

- The csv file is badly created; label and decimal separator do not correspond with the interface standard (Fig. 27). Therefore only column labels can be modified with <Fix Data> then you have to go back to the csv builder and check §B.
- Although the csv file is created following recommendations in §B parameters do not appear in panel 2. Therefore the problem is the category of the variable (numeric or character). This is an R importation issue that can be solve using <Fix Data>, then change the category to numeric (parameters) by clicking on column labels (if column with values with ',' as decimal separator are selected as numeric you will obtain missing values). Dates and sampling site are character category.

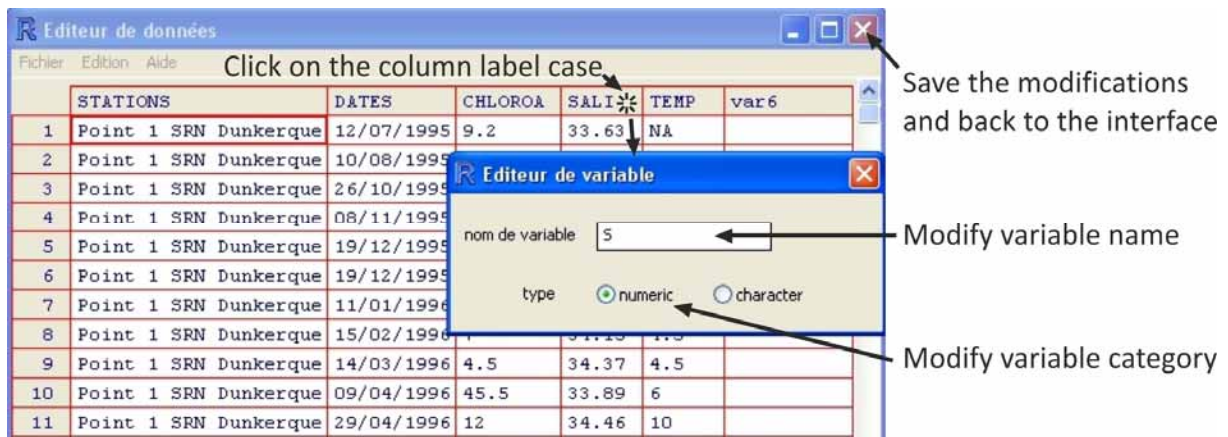



Figure 28. Data editor while <Fix Data> button is used.

By quitting the Fix Data panel, the new dataset is automatically read by the interface and a new csv file is saved with the nomenclature `FileName_fixed.csv`. Unfortunately data category cannot be saved in a csv file.


Editing your data do not change your save directory.

3. Parameters selection panel

If columns have been correctly labelled and categorised (see previous section), lists, sliders and frames should be automatically filled with appropriate values:

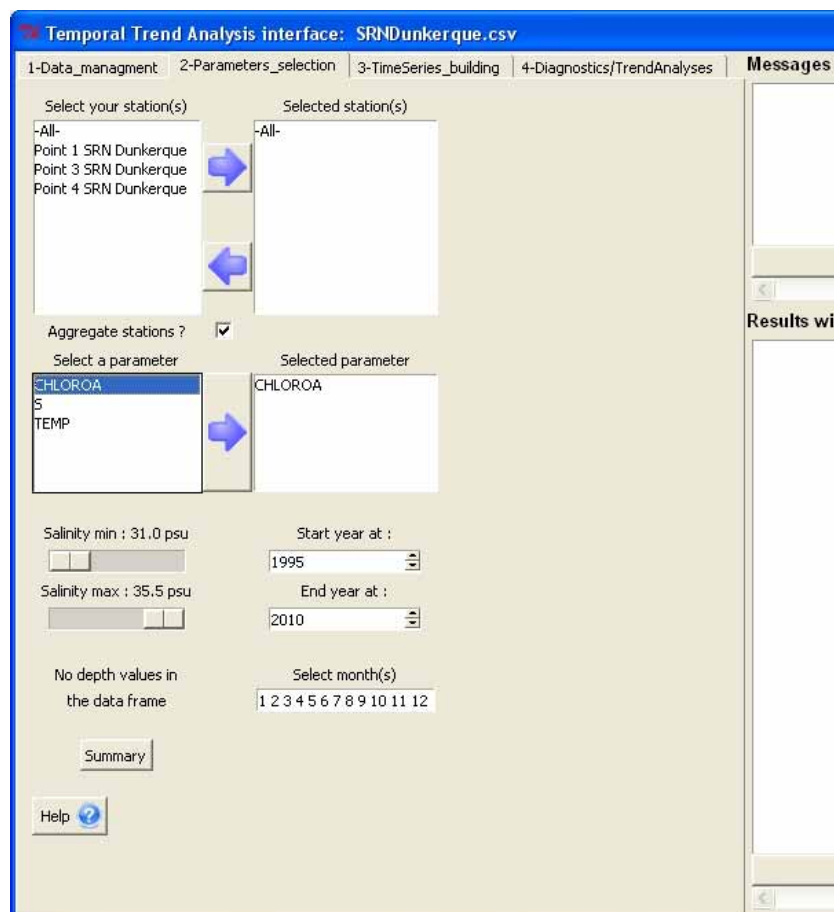

Otherwise:

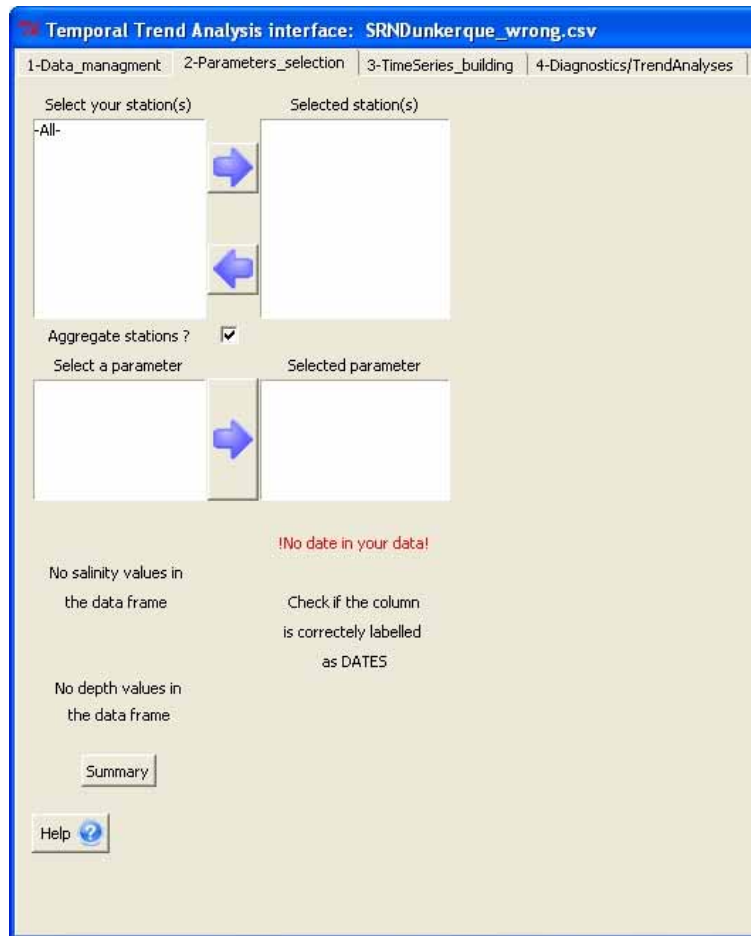

Let see details of each of these parts in the next section (§D.3.1 to §D.3.4).

3.1 Sampling stations

Sampling stations represent the area where data are measured, they can be redundant (like for fixed station) or unique (like for transect) in a database. The stations to be analysed can be selected using the arrows between the two selection boxes (Fig. 29): just select the station in the left box and click on the top arrow and the selected station will appear in the right box. This supports multiple selection using the 'Ctrl' key or by dragging the cursor. All stations can be analysed at once by selecting -All- in the left box. To remove stations just select them in the right box and click on the bottom arrow, it also supports multiple selection.

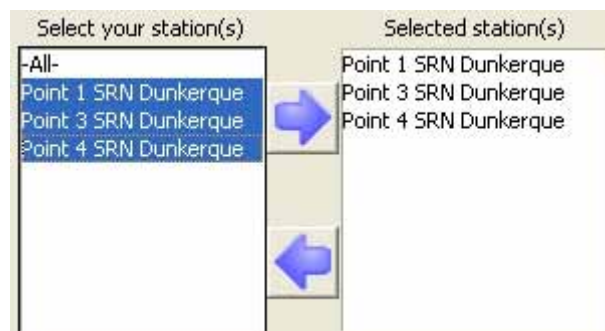


Figure 29. Selection boxes for sampling stations in panel 3, with selection arrows between.

By default the data of all stations are put together for analysis. However stations can be kept independently from each other by unchecking the appropriate box (Fig. 30). Therefore trend analyses are not possible as distinct regularised time series cannot be built from separate stations through the interface. The only function available is that of summarising the aggregated data table, and displaying a table and a plot of the aggregated data.




Figure 30. Aggregate stations check box in panel 3.

3.2 The parameters

The process of selecting the parameter to be analysed is the same as for the stations, except that only one parameter can be selected (it does not support multiple selection) and there is only one arrow for selection (no remove arrow) (Fig. 31). To replace a parameter already selected by another one, just select the new parameter in the left box and click on the arrow, it will automatically replace the previous one in the right box.



Figure 31. Selection boxes for parameter in panel 3, with selection arrow between.

3.3 Depth and salinity

In some cases analyses have to be performed at specific depth or salinity (which characterise the studied water masses). In the panel 2, there are 4 sliders to select these salinities and depths (Fig. 32). By default these sliders display the maximum and minimum values of salinity and depth in your dataset (if they exist). By keeping these values unchanged all data are taken into account for analysis, including data at missing salinity and depth. These values can be modified by sliding the cursors on the left or right or by clicking on the area next to the cursor to have a more accurate increment (± 0.5 unit), therefore data at missing salinity or depth are excluded from the analysis. Analysis can be performed at a unique depth or salinity by giving the same min and max values.

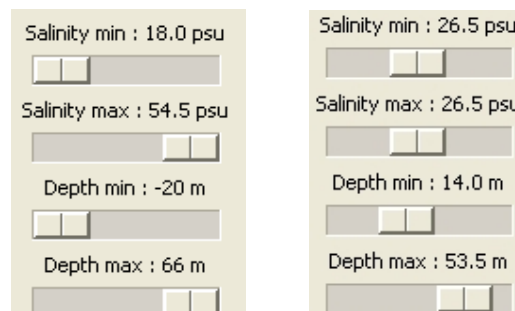


Figure 32. sliders to select specific salinity and depth before processing data. Left figure: default options; right figure: example of a selection of a given salinity (26.5) and a range of depth (14 to 53.5m)

3.4 Years and months

As for salinity and depth, years and months to be analysed can be modified. By default the two lists in panel 2 display the first and last years and the months present in your dataset (Fig. 33). Years can be modified just by clicking on the arrows or by typing it. Months can be deleted or added (the order is irrelevant) and there must be a space between the months. This can be useful to process data for a given period of a year, for example, to compare the productive period (in terms of phytoplankton development) versus the non-productive period of an area such as within the WFD.

Figure 33 shows two panels for selecting year range and months. The left panel shows default options: Start year at 1995, End year at 2010, and Select month(s) 1 2 3 4 5 6 7 8 9 10 11 12. The right panel shows analysis between 2001 and 2004 at 6 different months: Start year at 2001, End year at 2004, and Select month(s) 1 5 6 8 9 11.

Figure 33. Boxes to select year range and months at which you want to perform analysis. Left figure: default options; right figure: analysis between 2001 and 2004 at 6 different months.

4. Time series building panel

The third panel focused on time series regularization before proceeding to temporal trend analysis (Fig. 34).

Figure 34 shows the Temporal Trend Analysis interface for the file SRNDunkerque_fixed.csv. The interface has four tabs: 1-Data_managment, 2-Parameters_selection, 3-TimeSeries_building (active), and 4-Diagnostics/TrendAnalyses. The active panel contains the following options:

- Data interaction:**
 - Replace missing values? ☐
 - Remove outliers? ☐
 - Show boxplot
- Select the data frequency in your final time series:**
 - Daily ☐
 - Semi-fortnightly ☐
 - Fortnightly ☐
 - Monthly ☐
 - Yearly ☐
 - Monomensualy (see help) ☐
 - Guidance to choose the frequency ☐
 - Auto ☒
- Select the method to aggregate your data:**
 - Mean ☐
 - Median ☐
 - Quantile 0.9 ☐
 - Maximum ☐
 - Guidance to choose the method ☐
 - Auto ☒
- Show regularised time series:**
 - Plot
 - Table
 - Summary
- Buttons:** Help

Figure 34. Panel 3 with default options.

4.1 Missing values and outliers

The first frame of the third panel shows 3 different options to deal with missing values and outliers of your data (Fig. 35).

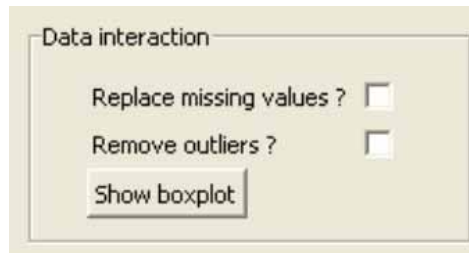


Figure 35. Data interaction frame options in panel 3.

Some diagnostic tools (spectrum analysis and seasonal decomposition, see §D.5.1) available in the GUI require regular time series and thus have regularly spaced measurement and contains no missing values. The option 'Replace missing values' replace the missing values from the time series (and not from the raw data) by values calculated from the data distribution. The final time series depend on the method of aggregation (see next paragraph); therefore missing values are calculated from aggregated data in two successive steps.

- Time series generally present strong autocorrelation, in this case value at time t depend on values at time $t+1$. Therefore missing values can be estimates (predicated) from linear regression (or more complex regression) of values around the missing value, however this is relevant only when few data are missed, long period of missing values cannot be replaced using this method (cannot efficiently extrapolate seasonal fluctuations)
- When missing values are present over a long period, and that there is a really need to replace them, they can be replace by the median of data from the same cycle (e.g. month, week, year, depending on the time step choose), inversely this method is less relevant than regression for shorter period of missing values (it loose the dependency due to autocorrelation).

The present interface uses a combination of both methods; the linear regression method to replace missing values in 3 successive units of time and the median method for longer period of missing values. The median method acts first to reduce the lag between missing values and to allow the regression method more frequently. Missing values at the beginning and at the end of the series are replaced using the median method if possible or are ignored.

Data distribution frequently contains outliers; these outliers are due, for example, to error of measurements or extreme natural event. In some cases these outliers can greatly influence statistical analysis comparatively to the rest of values and it should be interesting to remove them. The second option present in the frame (Fig. 35) allows you to remove these outliers and to save them in a separate csv file (in case you need to identify them). The method used to identify outliers is the boxplot method by years. For each year, values over $Q3+1.5(Q3-Q1)$ and under $Q1-1.5(Q3-Q1)$ are considered as outliers, with $Q1$ being the first quartile (25% of data distribution) and $Q3$ the third quartile (75% of data distribution). The <Show boxplot> button displays the box and whiskers plot with outliers (Fig. 11), this is the `boxplot()` function of the `graphics` package.

Both options, missing values and outliers, can be checked together or independently, outliers will be always removed first and missing values in second places.

4.2 Data frequency selection of your time series

Raw database generally display discontinuous time series, with missing values and variable measurement frequency between values. Temporal trend analyses generally need regularised time series to be performed. To build such regularised time series, the interface will aggregate raw data from the same selected period (day, week, month, year...) using a selected method (mean, median, max value...). These different options are available in frame 2 and 3 of the third panel (Fig. 36 and 37).

The second frame in panel 3 'Select the data frequency in your final time series' allows the selection of the time step at which the interface aggregates the data to build the regularised time series. Eight options are available (Fig. 36); the 5 first options are classic frequencies, daily (all data by day), semi-fortnightly (all data by 7 days), fortnightly (all data by 15 days), monthly (all data by month), yearly (all data by years). Monomensually aggregate all data by month, all years including.

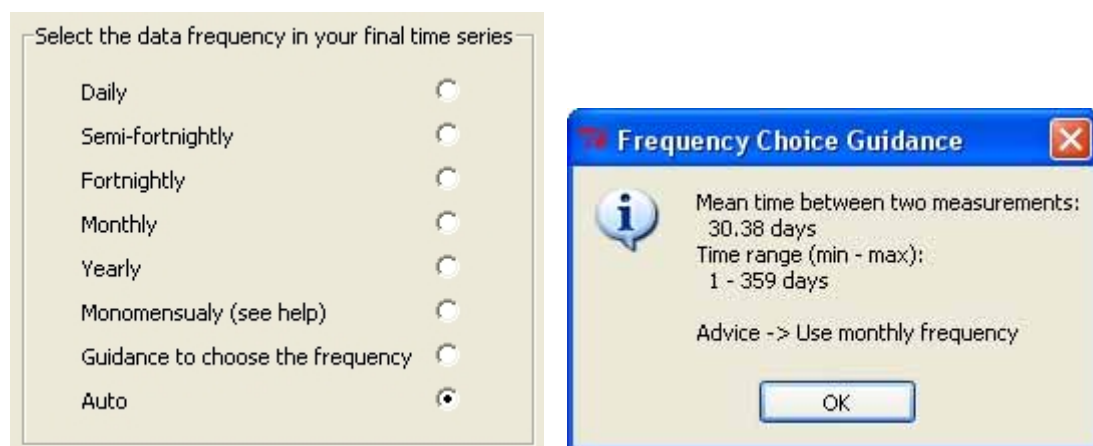


Figure 36. Data frequency selection frame and advice (guidance option).

It is better to choose a time step in relation with the theoretical sampling frequency of your data in order to keep the maximum of information without creating too many missing values. The option <Guidance to choose the time step> suggest a balanced choice by computing the mean time and the minimum and maximum period that separates two successive measurements in your database. This method is inspired from the *pastec* package (Grosjean and Ibanez, 2002). Arbitrary, if mean time between two measurements is under 10 days, the interface advice the semi-fortnight time step; if mean time is between 10 and 23 days, fortnight time step is advice; between 23 and 60 days, monthly time step is advice and over 60 days annual time step is advice. Monomensual time step is only available in manual choice. You are free to follow these suggestions or to select another time step knowing all the consequences that this could have for the interpretation of the results. The auto option (default option) will automatically apply the advice without displaying the suggestion. In some case, this method of aggregation is sufficient to remove all missing values in the regularised time series without using the <Replace missing values> option in §D.4.1.

4.3 Method of aggregation of your time series

The third frame ‘Select the method to aggregate your data’ (Fig. 37) allow the method with which data will be aggregated at the time step previously set to be chosen. Four methods are available: by averaging the data (Mean), by selecting the median of the data, by selecting the quantile 90% of the data or the maximum of the data of the same time step. The guidance option will also suggest the method that best fits the original data distribution. The interface compares data distribution obtained with each method (at the selected time step) with the raw data distribution using a Wilcoxon non-parametric test. The comparison with the highest p-value (less significant difference) determines the best method. You are also free to follow these suggestions or to select another method. The auto option (default option) automatically apply the advice without displaying the suggestion.

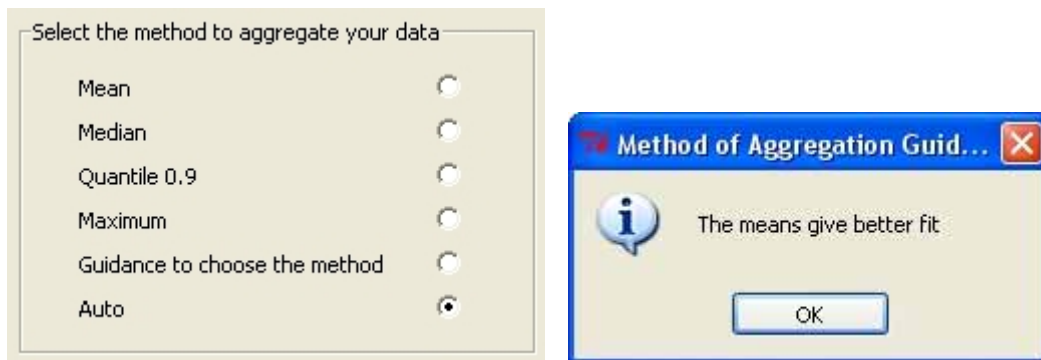


Figure 37. Aggregation method selection frame and method advice (guidance option).

4.4 Visualised your regularized time series

The fourth frame ‘Show regularised time series’ (Fig. 38) display the newly build regularised time series through a plot, a table or a summary. Plot and table will be saved in your computer. The table display column labels which vary as a function of the time step you selected. For all time steps, the first column label is the parameter selected for analysis, other column contain temporal indications. The years and months are indicated in the eponym columns. The week number within months (2 weeks/month with fortnight time step and 4 weeks/month with semi-fortnight time step) are indicated in the ‘week.month’ column. The week number within year (base on fortnight week) is indicated in the ‘week.year’ column (24 weeks/year for forthright time step and 48 for semi-fortnight time step). Week.year and week.month column are present only if fortnight or semi-fortnight frequency is selected. The DayYears column (present only if you choose daily frequency) show the number of the day within a year; in the interface a year has 366 days, non bissextile years have an extra day at the end of December with <NA> as parameter value. The ‘time’ column count the time between regularised measurements (the value of unit depend on the selected time step).

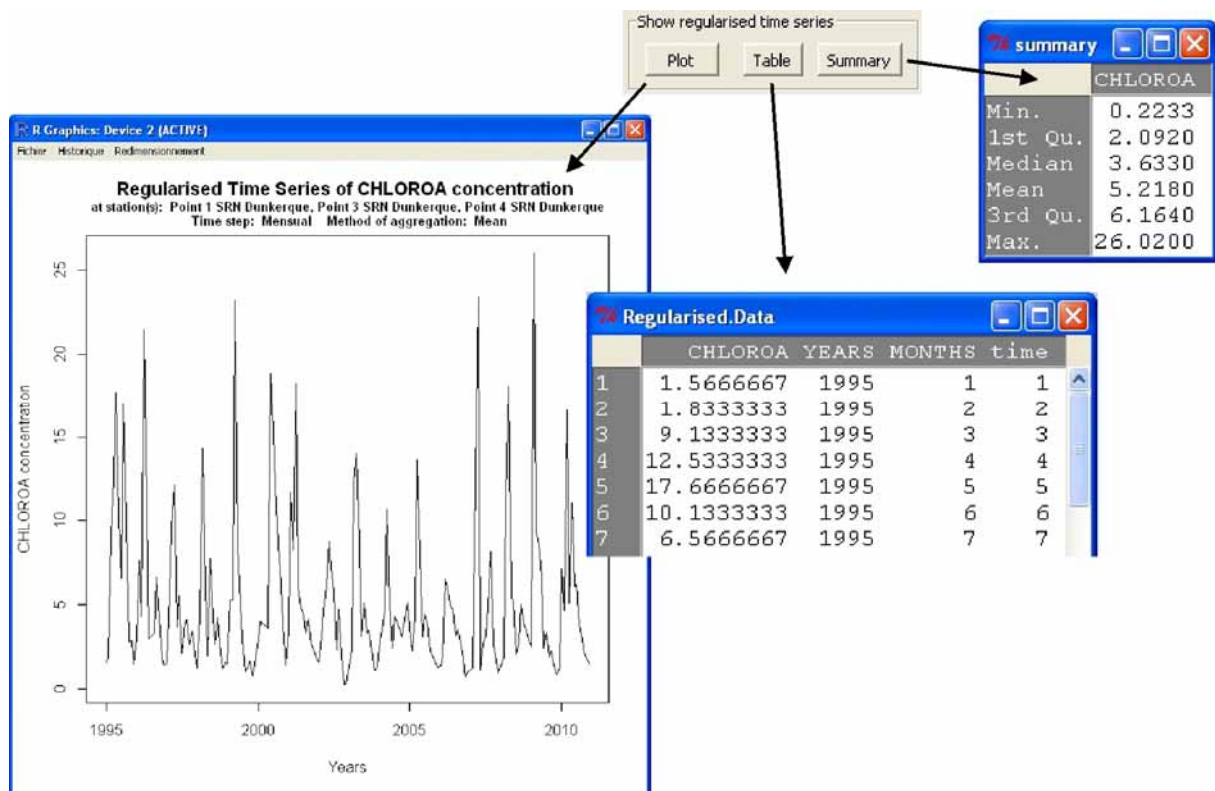


Figure 38. Regularised time series display options frame.

5. Diagnostics and statistics panel

5.1 Diagnostic tools

The options present in the first frame of the forth panel 'Diagnostics (optional)' (Fig. 36) are not required to perform temporal trend analysis but give additional information that can be useful to explain some patterns in the time series.

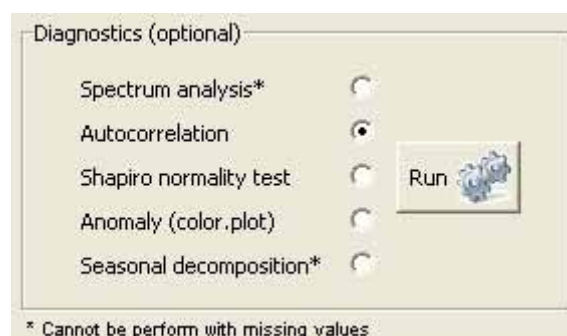


Figure 39. Diagnostic frame in panel 4

- **Spectrum analysis** allows to estimates the spectral density (discrete Fourier transform) of time series and to display a periodogram with confidence interval (Fig. 40). Spectrum analysis is concerned with the exploration of cyclical patterns of data. The purpose of the analysis is to decompose a complex time series with cyclical components into a few underlying sinusoidal (sine and cosine) functions of particular wavelengths. Then you can determine the frequency of each cycle (spectrum) present

in the time series from the most important to the less. In our program the basic unit is one year. Spectrum analysis cannot be performed with missing values. This is the `spectrum()` function of the `stats` package. For more information about Fourier transform and periodogram in R see also Shummway and Stoffer (2006).

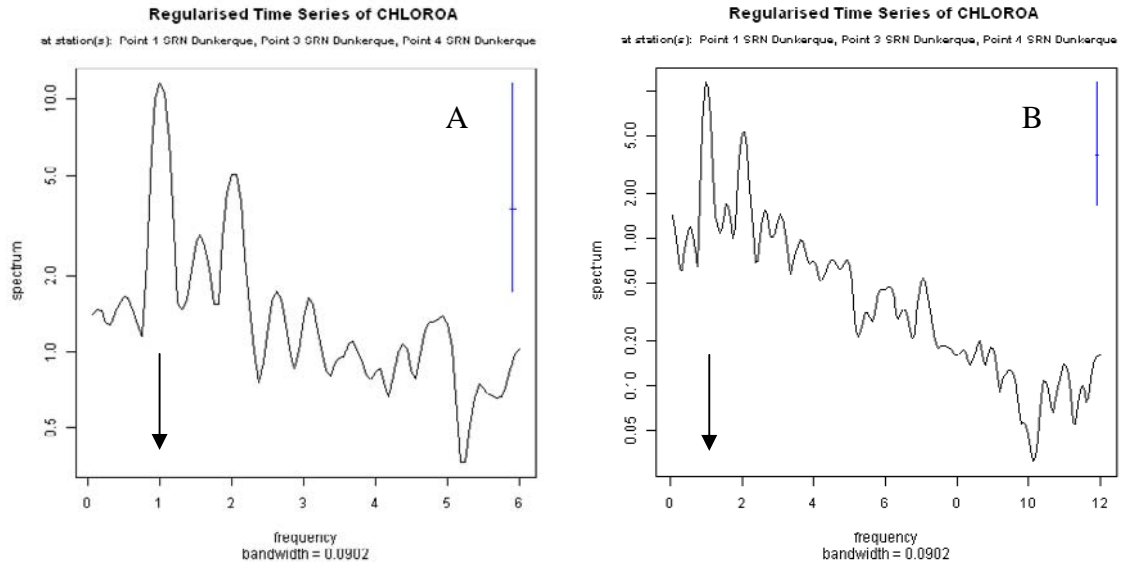


Figure 40. A. Spectrum density of monthly regularized time series of chlorophyll-a concentration (CHLOROA) at Dunkerque between 1995 and 2010. B. Same at semi-fortnightly scale. Blue vertical bar is confidence interval. Save as “SRNDunkerque_Spectrum_CHLOROA.png”.

Interpretation:

In this case the identify cycle (by arrow) is the annual cycle that show the highest spectrum at frequency = 1. It's likely the most common frequency you will certainly obtain as it is due to seasonality from year to year frequent in biological processes. Varying the time step of data aggregation will not degrade the signal as far as it stay under the mean sampling frequency of your data.

- **Autocorrelation** computes (and plots with confidence interval at 0.95) estimates of the autocorrelation function (Fig. 41). As for spectrum analysis the most frequently highest autocorrelation are observed at lag 1 (1 year) whatever the time step, only the number of subdivision between lags are determined by the time step selected to build the time series. This is the `acf()` function of the `stats` package. For more information about autocorrelation function in R see also Shummway and Stoffer (2006).

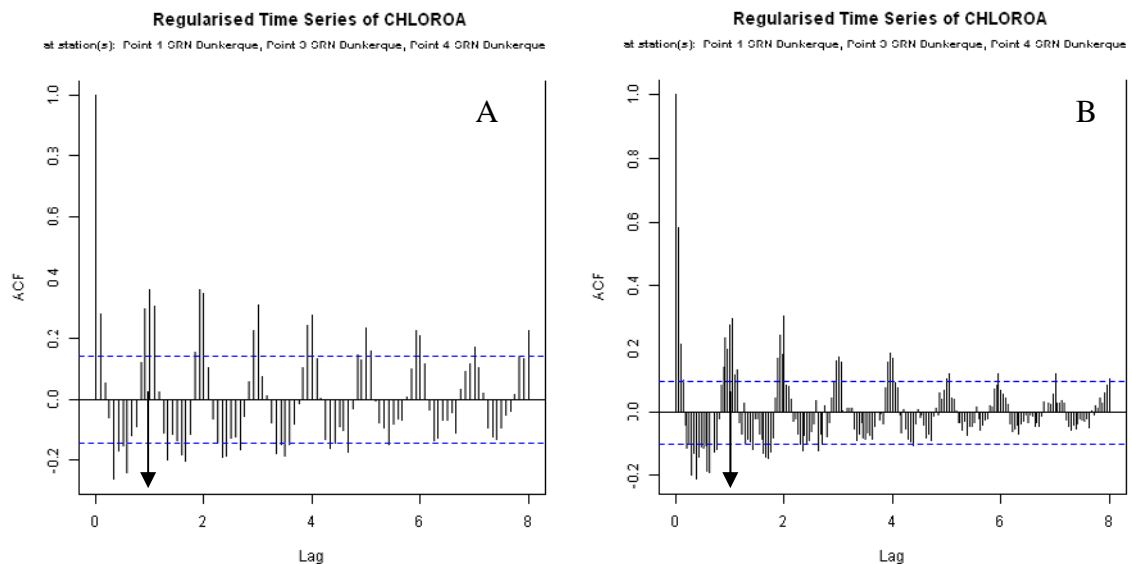


Figure 41. A. Autocorrelation of monthly regularized time series of chlorophyll-a concentration (CHLOROA) at Dunkerque between 1995 and 2010. B. Same at semi-fortnightly scale. Save as “SRNDunkerque_AutoCorr_CHLOROA.png”.

Interpretation:

In this case maximum positive autocorrelation is obtain for a lag of 1 (=1 year in our program) whatever the time step choose to aggregate the data. Autocorrelation is significant every 0.5 lag (6 months) up to 3 lags (3 years).

- **Shapiro normality test** (Shapiro–Wilk test) tests the null hypothesis that a sample came from a normally distributed population (Null hypothesis: follow a normal distribution, thus if the p-value is lower than the chosen alpha level (0.05 in our program), the sample don't follow a normal distribution). This is the `shapiro.test()` function of the `stats` package.
- **Anomaly** computes time series anomalies by $X_{ij} - X_i$, with X_{ij} value of the parameter X at the period i of the year j and X_i the median of the parameter X for the period i (all year mixed) (Fig. 42). It produces a contour plot with the areas between the contours filled in solid colour. Red colours show positive anomaly and blue colours negative anomalies. White areas occur when there are missing values. This option works only with time series build at monthly, semi-fortnight and fortnight time step. This is the `filled.contour()` function of the `graphics` package.

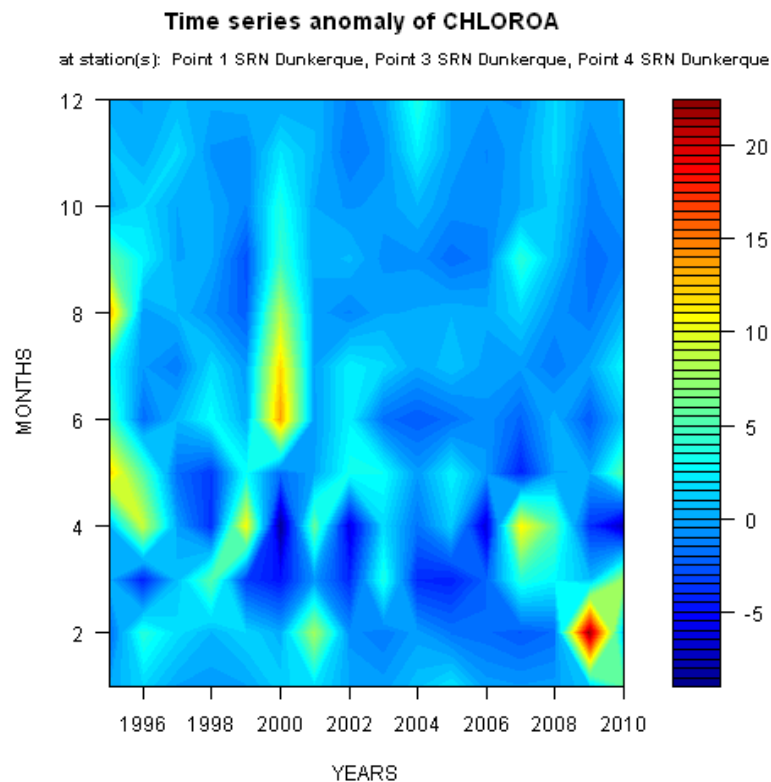


Figure 42. Color plot of chlorophyll-a concentration (CHLOROA) anomalies at Dunkerque between 1995 and 2011 at monthly scale (missing values are replaced here). Cold and hot areas represent respectively negative and positive anomaly. In some case, very strong positive anomalies can be represented by blue colours, it is due to the labelling range method actually use by the `filled.contour()` function. Save as “SRNDunkerque_ColorPlot_CHLOROA.png”.

Interpretation:

Positive anomalies (higher than ‘normal’) of chlorophyll-a concentration can be observed in 2000 and 2009 in summer and February respectively. Negative anomalies (lower than ‘normal’) are observed in early spring 2000 and 2002.

- **Seasonal decomposition** decompose and plot a time series into seasonal, trend and irregular components using loess (Fig. 43). The seasonal component is found by loess smoothing (locally weighted scatterplot smoothing) the seasonal sub-series. The remainder component is the residuals from the seasonal plus trend fit. The seasonal values are removed, and the remainder smoothed to find the trend. This is the function `stl()` of the `stats` package.

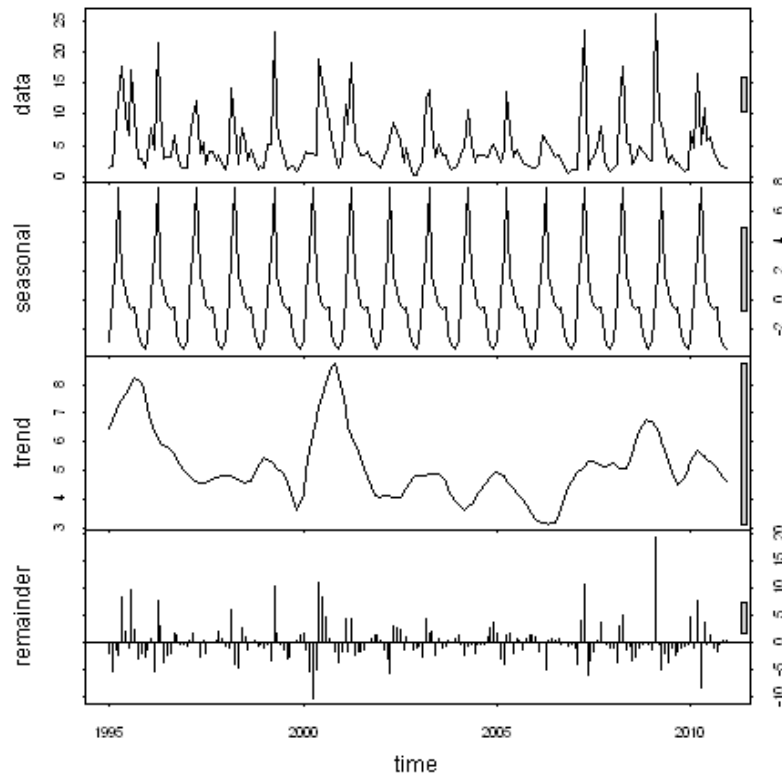


Figure 43. Plots obtain with the decomposition option with from top plot to bottom plot: regularized time series, seasonal component, global trend, and remainder.

Interpretation:

In this case chlorophyll-a concentration variations show a very high seasonal signal (2d plot). The overall trend shows an increase in 2001. Remainder (4th plot) show few seasonality pattern, so the major part of chlorophyll-a concentration variation is due to the seasonality.

5.2 Temporal trend tests

The second frame of the fourth panel display the available tests to perform the temporal trend analysis (Fig. 44).

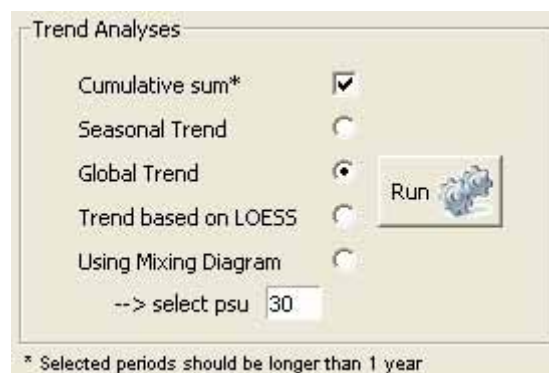


Figure 44. Trend analysis frame in panel 4.

- **Seasonal Trend** performs a Seasonal Kendall test on the time series with details of trend between months (Fig. 45). The Seasonal Kendall test takes the seasonal variability into account during trend assessment. This seasonality is not limited to a cycle of 12 months but is extended to the time step you choose to build your time series. The trend value is obtained by calculating a Mann-Kendall tests between season and performing a Sen's Slope estimator to estimate a value of this trend (median between ranks). This is the `seasonTrend()` function of the `wq` package. For more information about Kendall test see Hirsch et al. (1982) and Hirsch and Slack (1984).

Results are displayed in the right part of the interface and saved in a csv file with: trend column = trend of the parameter at the selected time step (season column) in original unit per year; p column = significance of the slope; missing column = proportion of missing slope at the time step; season column = counting of time step succession (1 to 12 for monthly, 1 to 24 for fortnightly etc...); %trend column = percent of mean quantity per year at the selected time step.

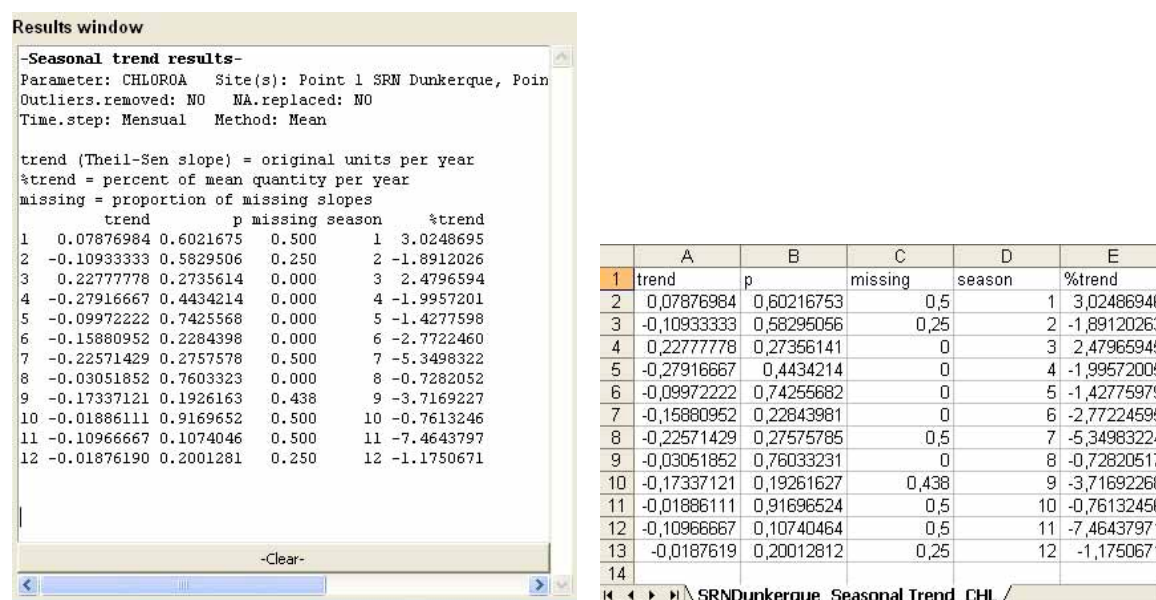


Figure 45. Results of the Seasonal Trend analysis (monthly scale) display in the right part of the interface (left) and saved in a csv file (right) as "OriginalName_Seasonal Trend_Parameter.csv".

Interpretation:

The trend of chlorophyll-a concentration vary as a function of the considered month, for example season 1 (first row = January in our example) show a trend of 0.078 $\mu\text{g/L/year}$ (trend column) that correspond to - 3% $\mu\text{g/L/year}$ (column %trend). However p.values shows that no trend is significant (all p-value > 0.05). Missing values are observed in our time series (missing column).

- **Global Trend** does the same test as above but gives the general trend without detail (Fig. 46). Also take the seasonal variability into account. Sen's Slope estimator is for the totality of the time series. This is the `seaken()` function of the `wq` package.

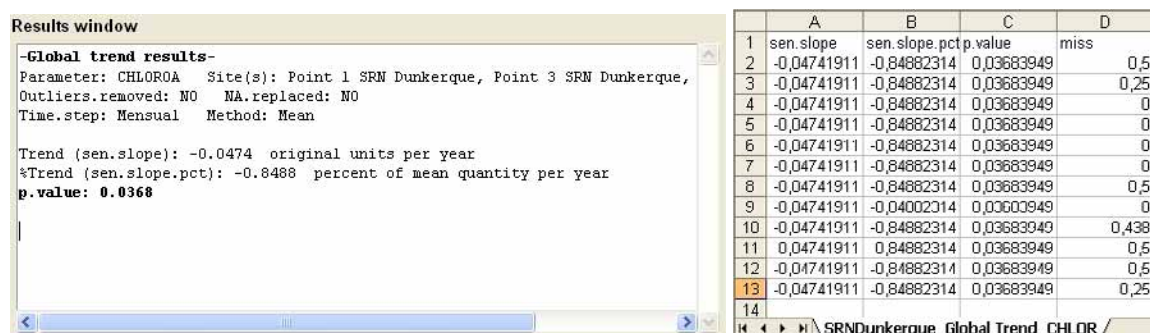



Figure 46. Results of the Global Trend analysis (monthly scale) display in the right part of the interface (left) and saved in a csv file (right) as “OriginalName_Global Trend_Parameter.csv”.

Interpretation:

The global trend of chlorophyll-a concentration is significantly ($p.value < 0.05$) low with $-0.0474 \mu\text{g/L/year}$, resulting from the strong variation among months (Fig. 44). It represents $-0.8\% \mu\text{g/L/year}$. The time series shows missing value (miss column in the right figure).

- **Cumulative sum** plots a cumulative sum curve of the time series and allow to manually identifying changes of the pattern (shift, trend) in your time series (Fig. 47). This method comes from the `cusum` function of the `pastecs` package. For more information about `cusum` function see also Ibanez et al. (1993). Once the periods are identified, the program performs the Global or Seasonal Trend test (as selected by the user) on each period. Only Global or Seasonal Trend test can be perform, if you select another test the interface returns a warning message asking you to choose a Kendall family test. The cumulative sum curve is automatically calculated from your time series with missing values removed (cannot work with missing values), however the trend calculations are perform on the time series build with your own options (so even with no replacement of missing values).

Once the option selected and the button <Run> clicked, a window with `cusum` curve in red will appear. The different points where there are changes in tendency have to be manually selected by left-clicking on the curve (Fig. 47). Once all points have been identify, right-click on the plot and check ‘Arrêter’/’Stop’, analysis will start automatically and result will be display on panel 5. You can close the plot window. Be careful to not close the plot window before checking right-click-‘Arrêter’/’Stop’, it will cause the interface to stop functioning.

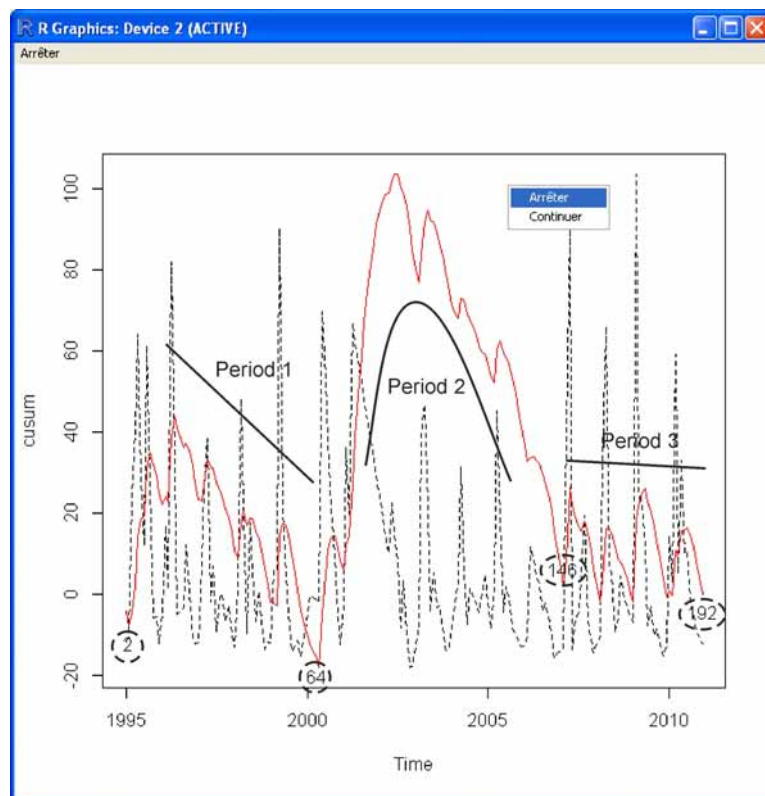

Results window

-Local trend results (global)-
 Parameter: CHLOR0A Site(s): Point 1 SRN Dunkerque, Point 3 SRN Dunkerque, Point 4
 Outliers.removed: NO NA.replaced: NO
 Time.step: Mensual Method: Mean

Period 1 : 1995,2 - 2000,5
 Trend (sen.slope): -0.5117 original units per year
 %Trend (sen.slope.pct): -8.7459 percent of mean quantity per year
p.value: 0.0194
 Ref. value of the complete series: 5.714 Mean trend compare to ref. value: 5.5559

Period 2 : 2000,5 - 2007,2
 Trend (sen.slope): -0.3267 original units per year
 %Trend (sen.slope.pct): -6.5282 percent of mean quantity per year
p.value: 0.0144
 Ref. value of the complete series: 5.714 Mean trend compare to ref. value: 5.9604

Period 3 : 2007,2 - 2010,12
 Trend (sen.slope): 0.1892 original units per year
 %Trend (sen.slope.pct): 3.1846 percent of mean quantity per year
 p.value: 0.5729
 Ref. value of the complete series: 5.714 Mean trend compare to ref. value: 5.6713

-Clear-

Figure 47. Top figure: chlorophyll-a concentration ($\mu\text{g/l}$) variations near Gravelines (hatched black line) with cusum plot (red line) and different periods identified (solid black lines). Bottom figure: results of a global trend apply on each of these periods display in the right part of the interface.

Interpretation:

The global trend of chlorophyll-a concentration is significantly negative during the two first periods (1995-2000 and 200-2007), with -8.7% and -6.5% of $\mu\text{g/L/year}$. The trend during the last period is not significant ($p.\text{value} > 0.05$). These decreases are observed only during these periods and not between periods.

- **Trend based on LOESS:** A loess smoothed curve of the regularised time series is considered to perform a Global Trend test instead of the time series itself (Fig. 48). This is the `loess()` function of the `stats` package.

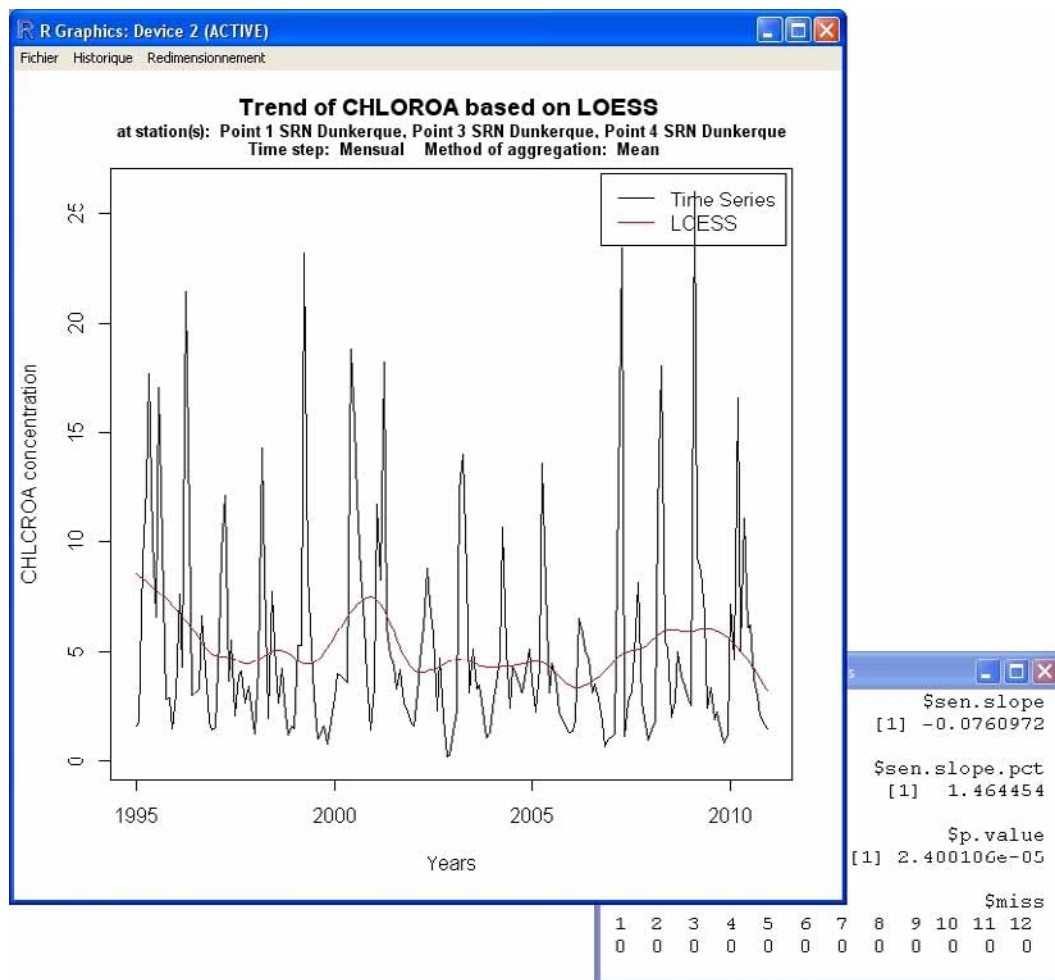


Figure 48. Plot of the regularised time series of chlorophyll-*a* concentration ($\mu\text{g/l}$) (black line) and loess smoothing (red line). Background table displays result of global trend test perform on loess smoothed data, results are also shown in the right part of the interface.

- **Mixing Diagram:** To consider temporal trend of nutrient concentration in a salinity gradient, a widely used method consist to used monthly normalized concentration of nutrient at fixed salinity (generally 30) instead of raw data to perform temporal analyses (OSPAR, 2002). To normalize, a monthly linear regression is done between raw salinity and nutrient concentration (one regression per month). From these linear regression equations, normalized concentrations of nutrient are estimated at the salinity you enter in the text box 'select psu' (Fig. 44). Thus, a monthly time series is build using the new normalized concentrations instead of the aggregated raw data (this test is independent from the time step and aggregation method selected on panel 3). A Global Trend analysis is performed on this time series. Such method is generally used to analyse variation in winter concentration of nutrient. This can be easily obtain in the interface by selecting winter months (1 2 3) in panel 2 and perform the Mixing Diagram analysis.

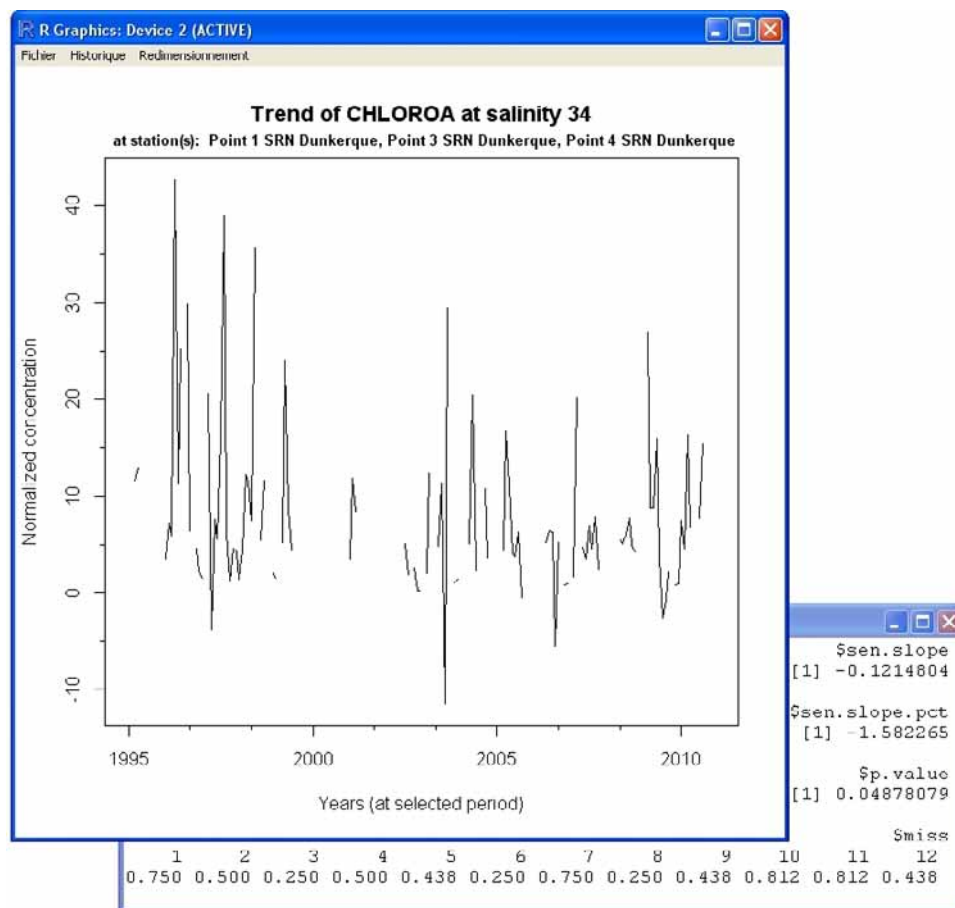


Figure 49. Plot of normalized concentration of chlorophyll-*a* at salinity 34 between 1995 and 2011 near Gravelines (not enough data in winter for winter normalization). Table displays results of global trend test on these data, results are also shown in the right size of the interface.

All mixing diagram (example from another database in Fig. 50) are saved for each months and year (if possible) but not display, only the final results (plot of the time series and Global Trend results) is display by the interface (Fig. 49). A csv table containing all normalized concentration of nutrient per months/years is also generated and saved.

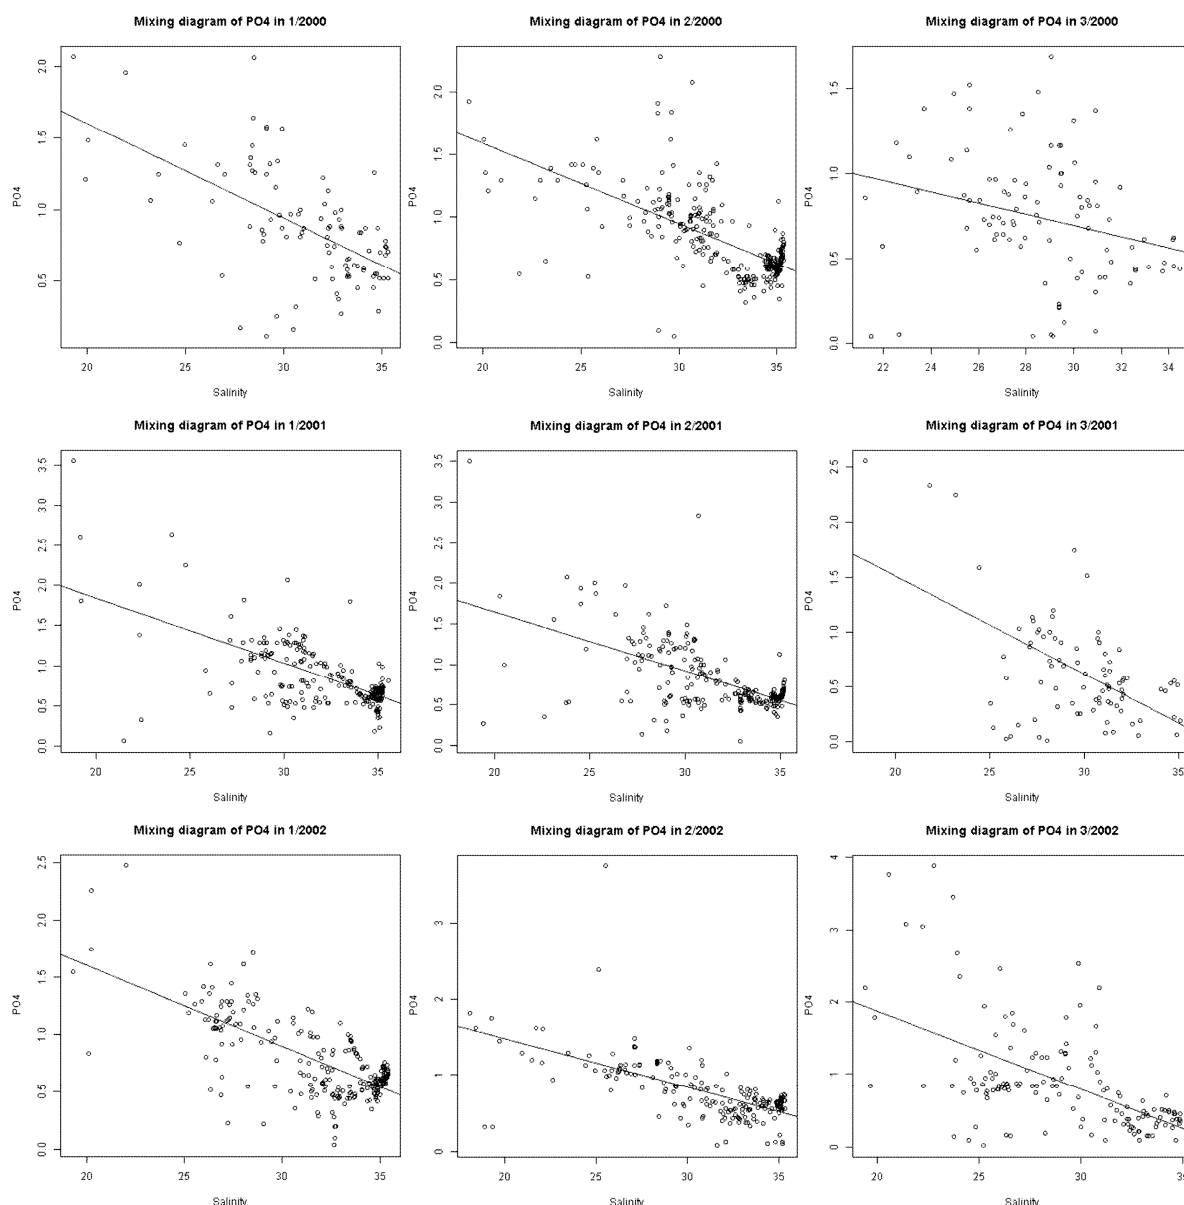


Figure 50. Plot of PO4 concentration against salinity by month/year with linear regressions. Data from another database (just for the example).

6. Results and messages

The right part of the interface displays results of your analysis (as mention in the other sections) in the bottom text box and other messages in the top text box. Results text box displays more information than the saved csv file like the option you chose to build the time series.

There is an option to clear the text boxes, but be careful you cannot cancel this clean up action. So if you want to save some specific results, do it before cleaning the box. So you can save the text in the box by simply copy-paste (ctrl-c / ctrl-v) in the bloc-note and then import the data in Microsoft Excel.

7. Extra advices

Importing a new csv file, changing the save directory or editing your data with <Fix data> will reset all your options to default. Changing stations or any other parameters in panel 2 will not change options in panel 3 and 4, which allow performing rapid analysis among the different parameters of your dataset. Also for rapid analysis you can choose your parameter and stations in panel 2 and passed directly at the panel 5, balanced options in panel 3 are reselected by default.

References

Hirsch, R.M., J.R. Slack, and R.A. Smith, 1982. Techniques of trend analysis for monthly water quality data. *Water Resources Research* 18(1):107-121

Hirsch, R.M. and J.R. Slack, 1984. A non parametric trend test for seasonal data with serial dependence. *Water Resources Research* 20(6):727-732.

Ibanez, F., J.M. Fromentin and J. Castel, 1993. Application of the cumulated function to the processing of chronological data in oceanography. *Comptes Rendus de l'Académie des Sciences Serie III - Sciences de La Vie - Life Sciences*. 316:745–748.

OSPAR, 2002, Common assessment criteria, their (region specific) assessment levels and guidance on their use in the area classification within the comprehensive procedure of the common procedure. OSPAR 02/8/2-E.

Shumway R.H. and D.S. Stoffer, 2006. Time series analysis and its applications with R examples, 2nd edn. Springer.